

LUMINWISE

**Modular
lighting system**

**Lighting for your space and
enhances the objects in the space**

NEW


Modular system



MAGNET ATTACHMENT



Modular system luminaires

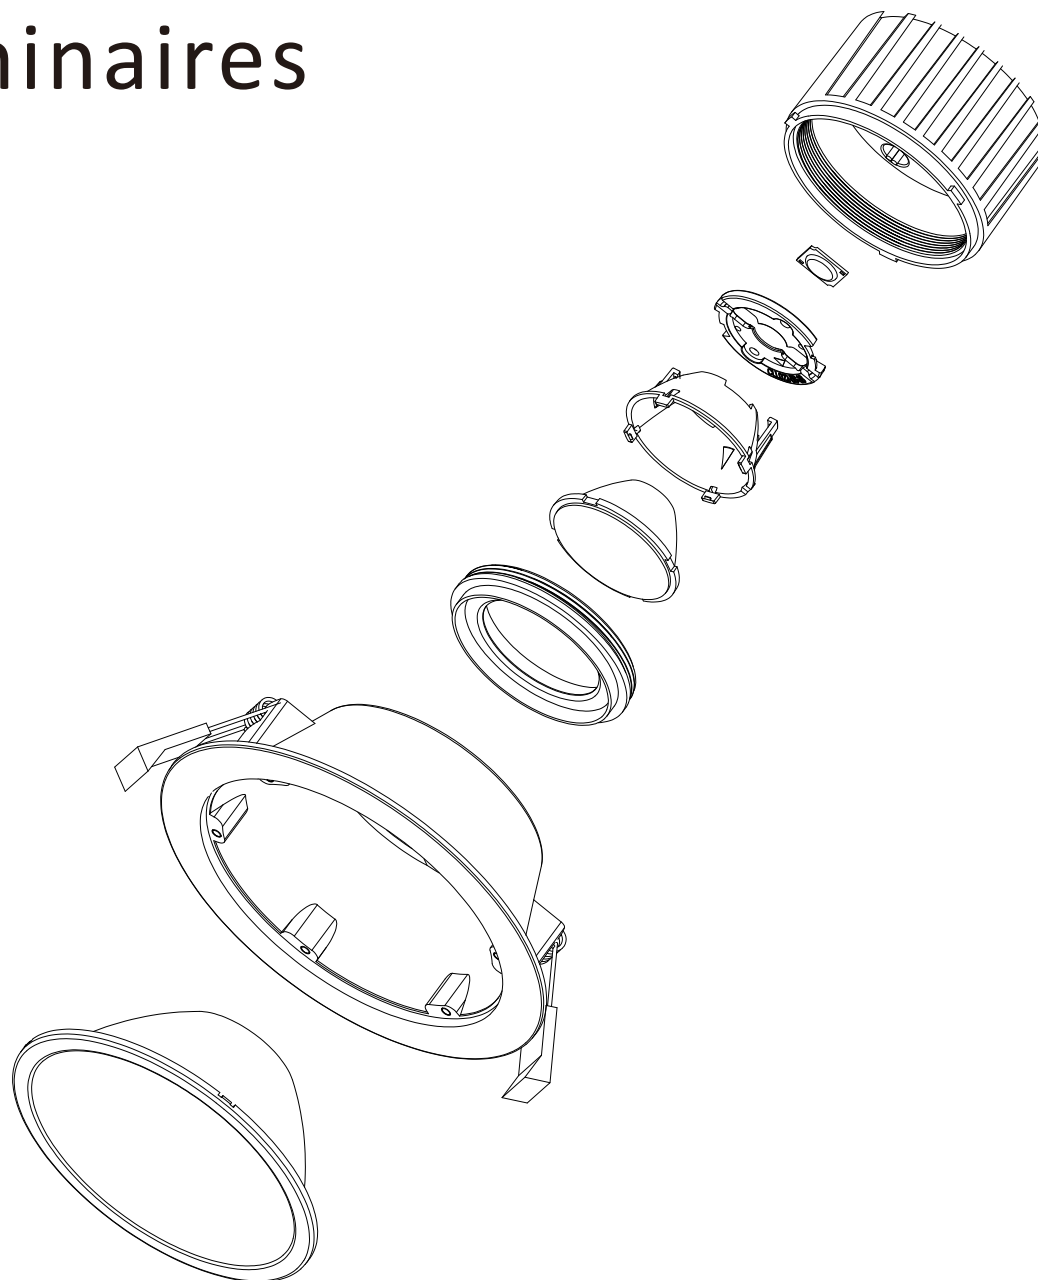

NEW

UGR<16



LED light module (3 version)



Light module 1



Light module 2



Light module 3

Module specification

Wattage	5-20W	20-30W	20-40W
Size	D70xH42mm	D70xH76mm	D120xH55mm
Materials	ADC12 Die cast aluminum	ADC12 Die cast aluminum	ADC12 Die cast aluminum
LED brand	Citizen, CREE, Bridgelux	Citizen, CREE, Bridgelux	Citizen, CREE, Bridgelux
CCT	2700/300/350//4000K DIM2WARM 2000-3000K Tunable white 3000-6000K Tunable white 2700-5000K Tri-color 3000/4000/5000K	2700/300/350//4000K DIM2WARM 2000-3000K Tunable white 3000-6000K Tunable white 2700-5000K Tri-color 3000/4000/5000K	2700/300/350//4000K DIM2WARM 2000-3000K Tunable white 3000-6000K Tunable white 2700-5000K Tri-color 3000/4000/5000K
CRI	Ra 80+,90+97+	Ra 80+,90+97+	Ra 80+,90+97+
Optics	Lens, reflector	Lens, reflector	Lens, reflector
Beam angle	15/24/38/60°	15/24/38/60°	15/24/38/60°
UGR	<19	<19	<19
Efficiency	80-150lm/W	80-150lm/W	80-150lm/W
Voltage	DC36V	DC36V	DC36V
Current	150-500mA	500-700mA	500-950mA
Finish color	Black	Black	Black

How the module system works?

Light module

- COB Single color
- COB Tri-color
- COB DTW
- COB RGB
- COB RGBW
- SMD single color
- SMD Tri-color



Light fixture



- LED tracklight
- Suspension light
- Adjustable light
- Ceiling mounted light


Fixture with light module

- Single color COB LED downlight
- Tri-color COB LED downlight
- DTW COB LED downlight
- RGB COB LED downlight
- RGBW COB LED downlight
- Single color SMD LED downlight
- Tri-color SMD LED downlight




Dimmable solution

- DALI
- TRIAC
- 0/1-10V
- ZigBee
- BLE/CASAMBI
- 2.4GRF
- DMX
- Push
- Self diming



Completed led light with different dimmable solution

- DALI Dimmable Single color COB LED downlight
- DALI Dimmable Tri-color COB LED downlight
- DALI Dimmable DIM2WARM LED downlight
- DALI RGB LED downlight
- DALI RGBW LED downlight
- DALI Dimmable Single color SMD LED downlight
- DALI Dimmable Tri-color SMD LED downlight
- On/off COB LED downlight
- On/off SMD LED downlight

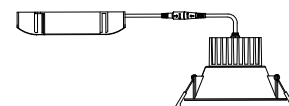

Light module


- COB Single color
- COB Tri-color
- COB DIM2WARM
- COB RGB
- COB RGBW

- SMD Single color
- SMD Tri-color
- SMDDIM2WARM
- SMD RGB
- SMD RGBW
- SMD single color
- SMD Tri-color




Reflectors interchangeable

	size 1	size 2	size 3	size 4
	D80mm	D106mm	D150mm	D188mm
Color	Black Silver Glod White	Black Silver Glod White	Black Silver Glod White	Black Silver Glod White
Materials	Aluminum 1090	Aluminum 1090	Aluminum 1090	Aluminum 1090

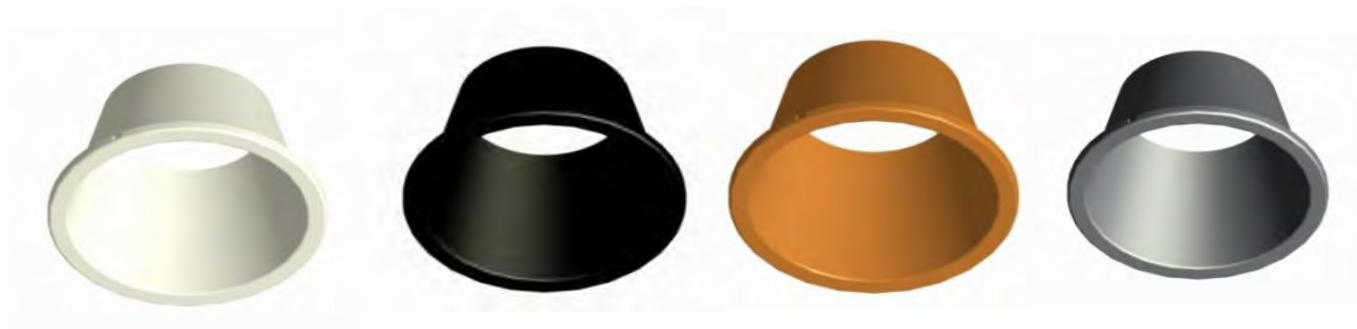


*Four size reflectors with four colors option

Quick interchange with Magnet design

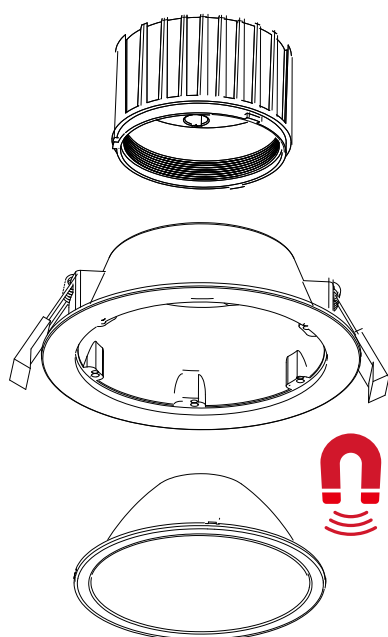


MAGNET ATTACHMENT

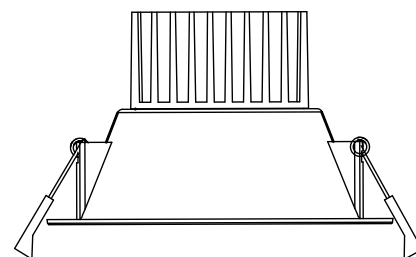


1. Choose the right color reflector color, fix the safety cable




2. Put the reflector to the body

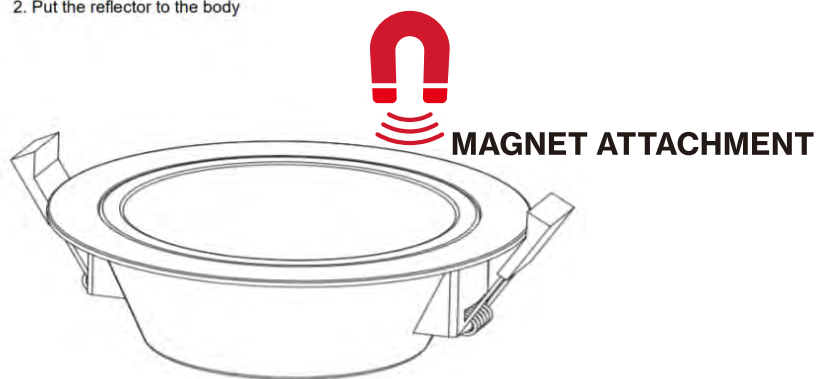


3. Choose the right light module (Color, CRI, Wattage, Beam angle, lm/W)

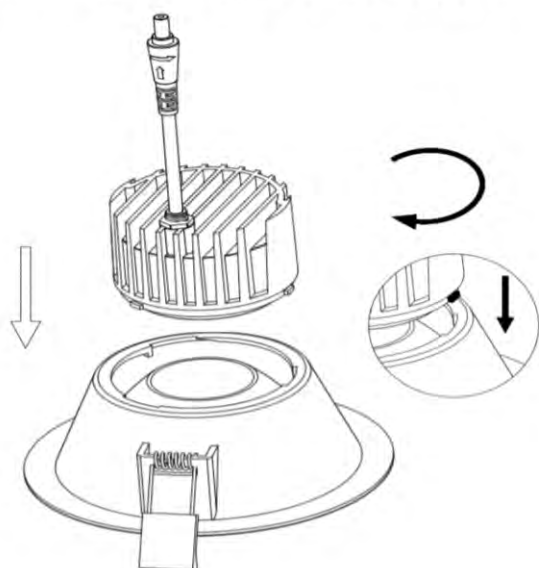


Installation

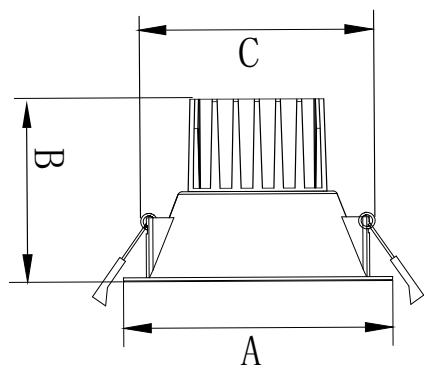


Product Model	Size(A)	Size(B)	Cut out (C)
DL0315WM	110mm	80mm	90-100mm
DL0420WM	135mm	83mm	120-125mm
DL0430WM	135mm	117mm	120-125mm
DL0630WM	200mm	110mm	165-180mm
DL0840WM	240mm	126mm	200-220mm

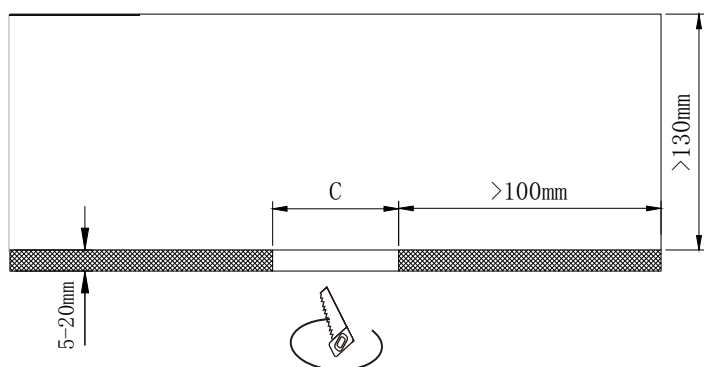


1, Cut hole according to exact which size you purchased

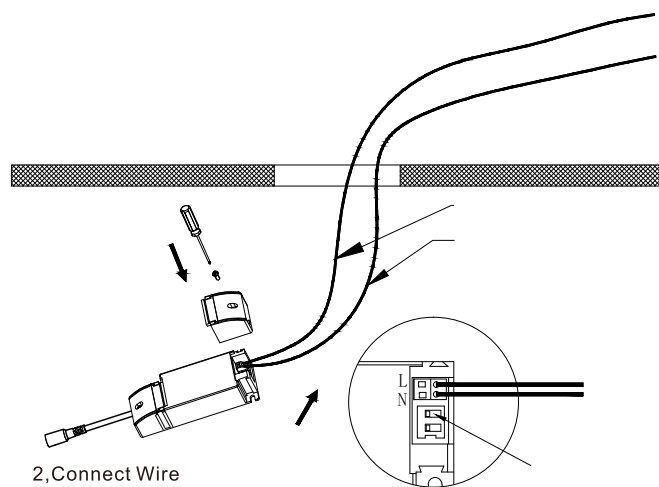

2, Connect Wire


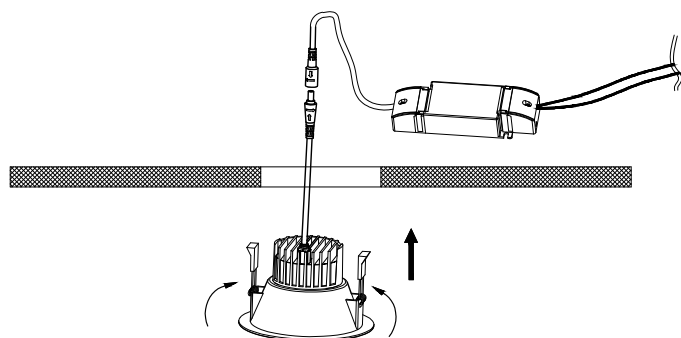


3, Fit the luminaire in the hole

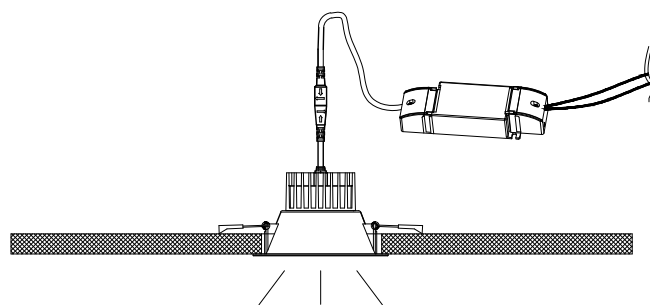









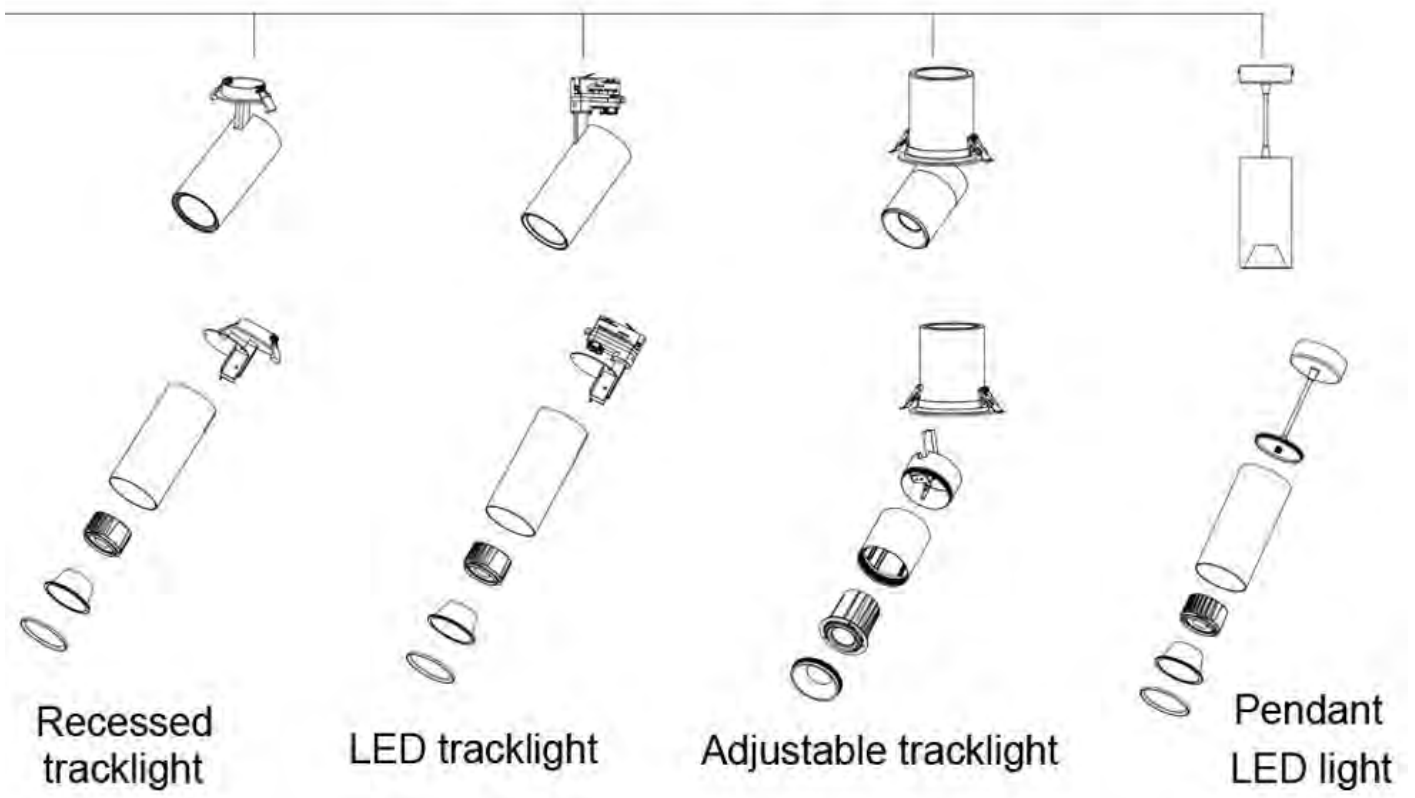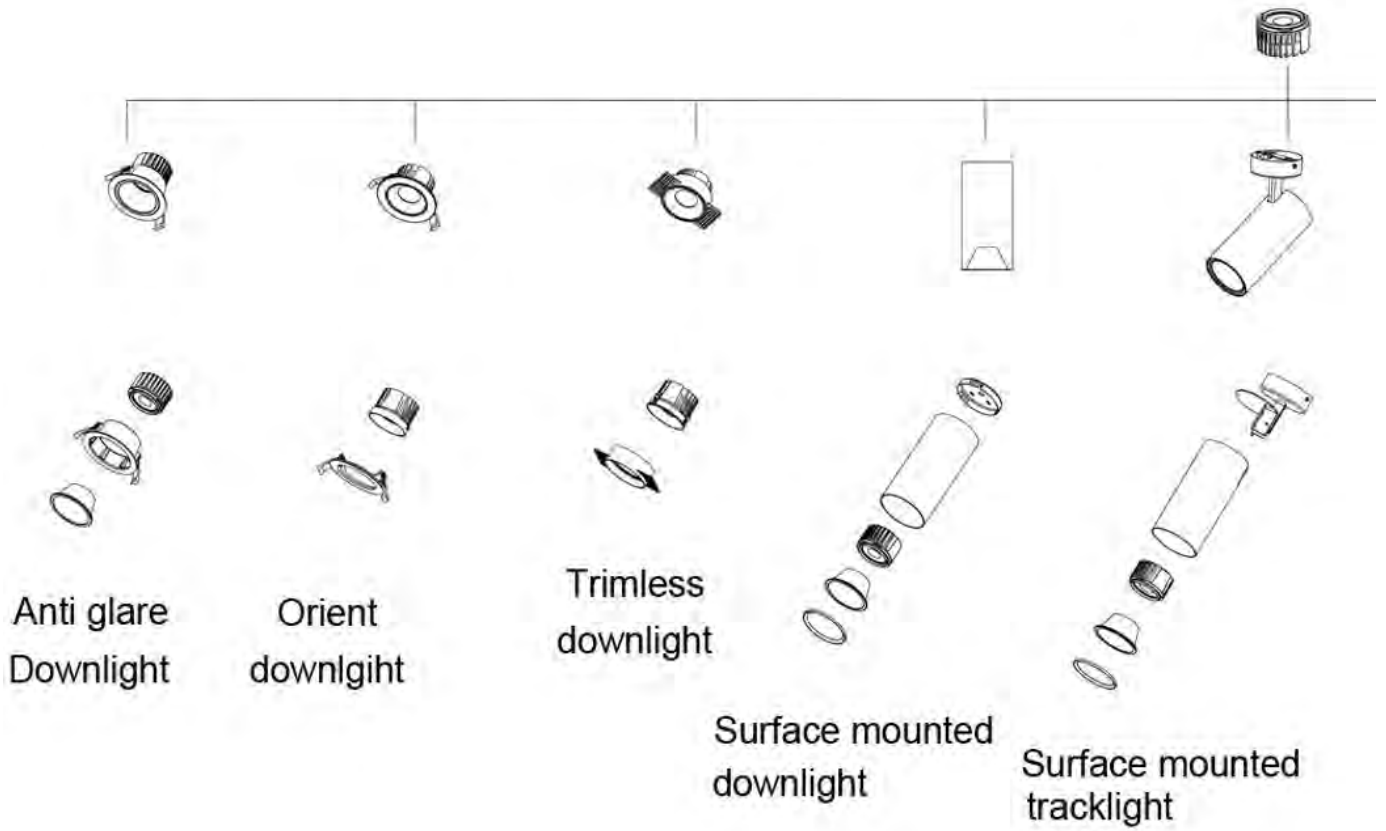









4, Finish

Structure designs



3 types of light module expand to more than ten different led fixtures

Surface mounted downlight	LED Tracklight	Surface mounted tracklight	Recessed tracklight	Adjustable tracklight	Pendant LED light
					
90x190mm	90x190mm	90x190mm	90x190mm	90x130mm	90x190mm
10-15W	10-15W	10-15W	10-15W	10-15W	10-15W
Surface mounted downlight	LED Tracklight	Surface mounted tracklight	Recessed tracklight	Adjustable tracklight	Pendant LED light
					
90x190mm	90x190mm	90x190mm	90x190mm	90x130mm	90x190mm
Watt 15-30W	Watt 15-30W	Watt 15-30W	Watt 15-30W	Watt 15-30W	Watt 15-30W
Surface mounted downlight	LED Tracklight	Surface mounted tracklight	Recessed tracklight	Adjustable tracklight	Pendant LED light
					
130x180mm	130x180mm	130x180mm	130x180mm	coming soon	130x200mm
Watt 20-35W	Watt 20-35W	Watt 20-35W	Watt 20-35W		Watt 20-35W

LUMIWISE
LIGHTING

SHENZHEN LUMIWISE LIGHTING CO.,LTD

F/4 Block A Building,HongFa High Tech Industry park,
Tang Tou round,shiyao Town,Bao'an district,Shenzhen PRC

Email: sales@lumiwise-lighting.com

Tel: 0086-0755-23315096

Web: www.lumiwise-lighting.com



Concept&design by Lumwise lighting

All of information is subject to change without notice
Lumwise lighting CO.,LTD @All rights reserved