


Cylinder 110



Product specification

INTERIOR TRACK LIGHT	
Installation	Track light
Cut out	-
Dimension	218 x 110 x 200mm



Technical description			
Article number	TL11040WB SE		
LED Consumption	35.7W (CITIZEN)		
Current	1050mA		
CCT	2700K	3000K	4000K
Lumen *1	5700lm	5800lm	5890lm
system *3	4608lm	4687lm	4735lm
Voltage	36V DC		
Reflector	15°20°30°60°		
CRI	>80 (PREMIUM 90+)		
Driver	Built in , I/P: 220-240V 50/60HZ O/P: 27-42V 1050mA 40W Max		



Technical character	
Insulation	CLASS I
Protection	IP 20
Tilt	0~90°
Rotate	0~355°
Operating temperature	-20~40°C
Average Failure Time	L70(10k) >60000 (h)

Materials	
Luminaire	aluminum extrusion
Reflector	optic lens
Heat sink	aluminum extrusion
Gear box	none
Color available	white / black
Driver	built in ,DALI 1-10VDC ,TRIAC option

Package

inner box	115x115x305mm
outer box	478x365x325mm 16.2kg 12PCS/CTN

Accessories

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier


*3. LUMEN(system) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

Photometric


CRI80 15°

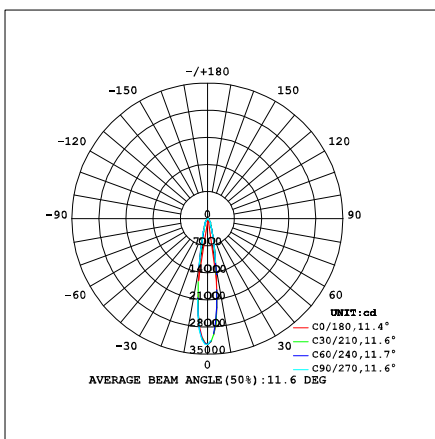


3000K

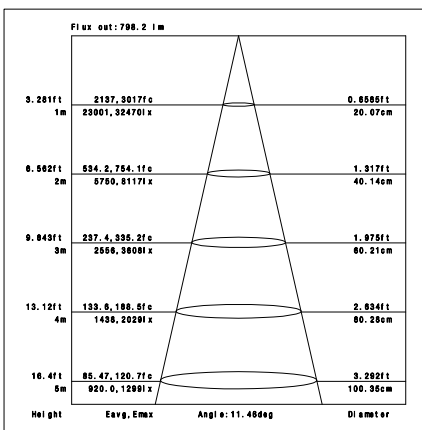


4000K

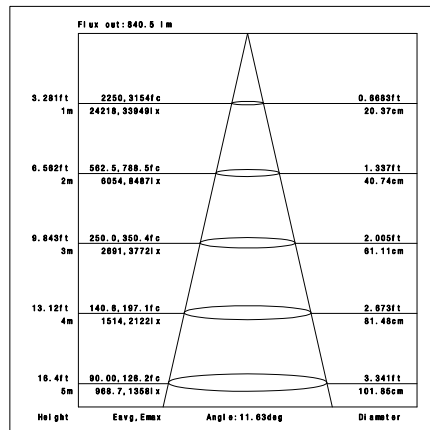


CRI80 20°

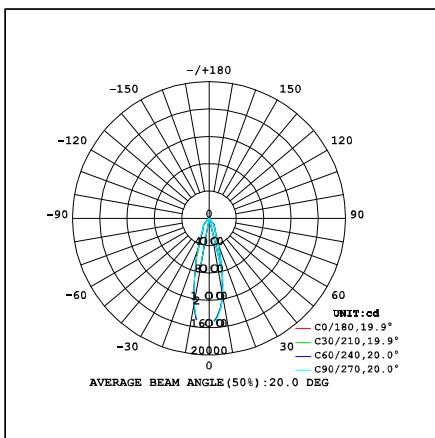


3000K

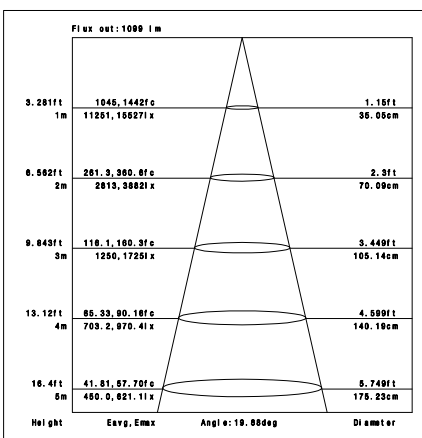


4000K

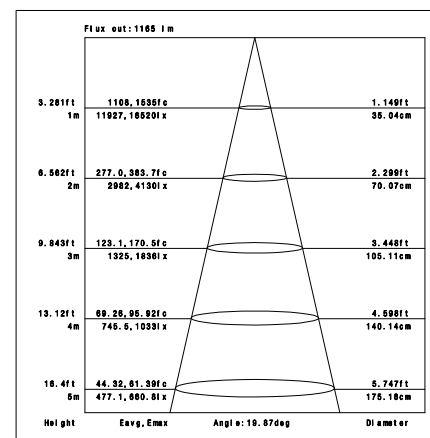


CRI80 30°

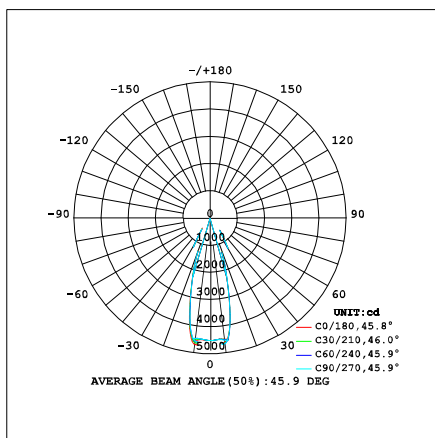




3000K

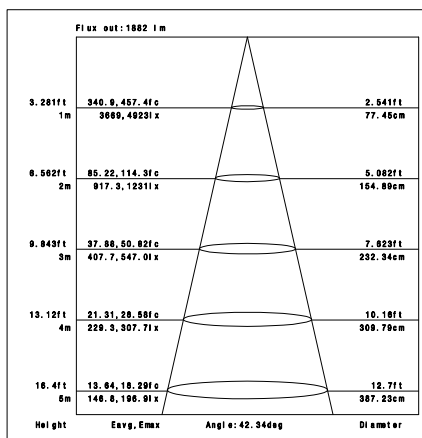




4000K

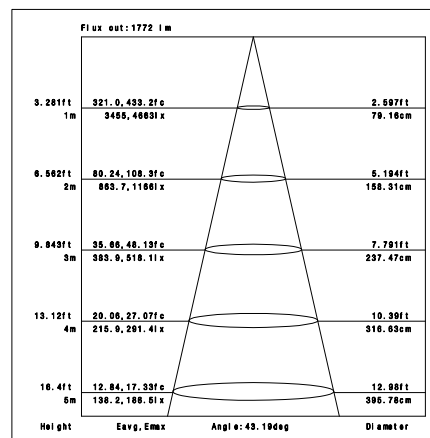


Adaptor installation diagram

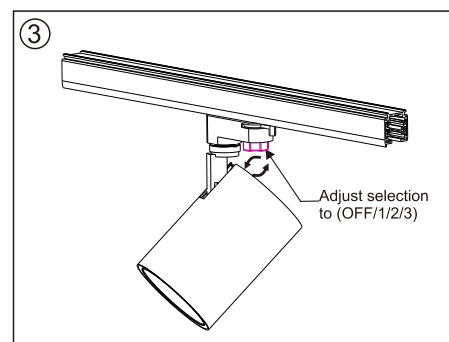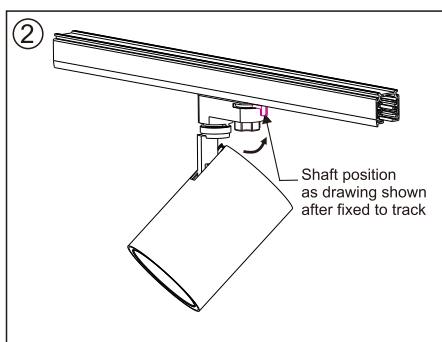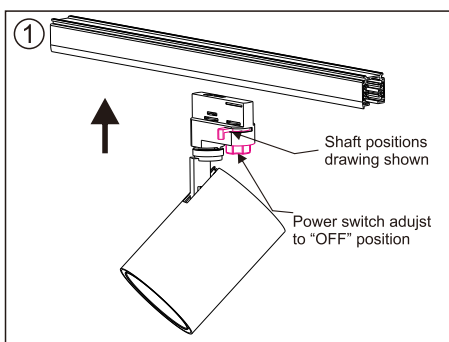

Adaptor disassembly diagram

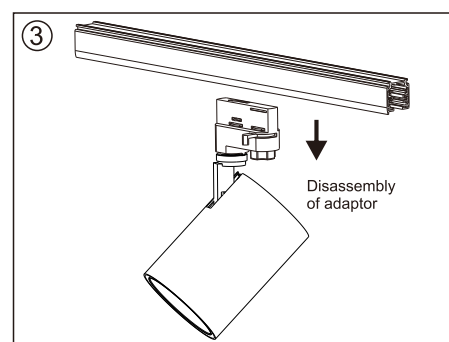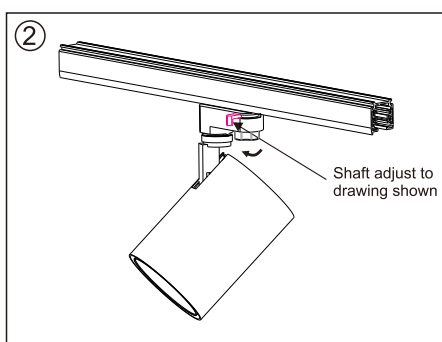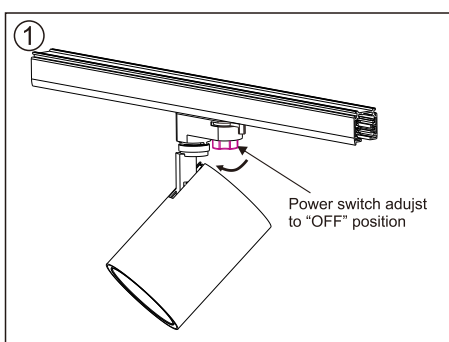

Installation Accessories



TRACK



X connector



Surface mounting kit



Straight connector



Live connector



T connector



L connector





End cap



Quick T-BAR



Suspension cable

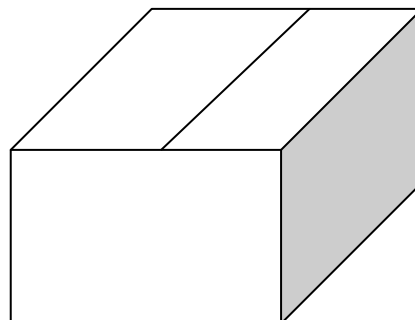Packaging:

Box
135x135x305mm
1pc/box
GW: 1.2kg/box

Outer carton
478x365x325mm
12pcs/CTN
GW: 16.2kg/carton

Applications:

Widely applied for accent lighting or wall washer in retail shops, galleries, museum or any other interior lighting.



fashion



home store



department store



automotive



consumer
electronics



food