


Cylinder 130



Product specification

INTERIOR TRACK LIGHT

Installation	Track light
Cut out	-
Dimension	218 x 130 x 200mm



Technical description			
Article number	TL130A50WB		
LED Consumption	43.7W (CITIZEN)		
Current	1200mA		
CCT	2700K	3000K	4000K
Lumen *1	6700lm	7100lm	7300lm
system *3	5345lm	5467lm	5567lm
Voltage	36V DC		
Reflector	15°20°38°		
CRI	>80 (PREMIUM 90+)		
Driver	Built in , I/P: 220-240V 50/60HZ O/P: 27-42V 1200mA 50W Max		



Technical character	
Insulation	CLASS I
Protection	IP 20
Tilt	0~90°
Rotate	0~355°
Operating temperature	-20~40°C
Average Failure Time	L70(10k) >60000 (h)

Materials	
Luminaire	aluminum extrusion
Reflector	optic lens
Heat sink	aluminum extrusion
Gear box	none
Color available	white / black
Driver	built in ,DALI 1-10VDC ,TRIAC option

Package

inner box	135x135x305mm
outer box	425x425x325mm 16.5kg 9PCS/CTN

Accessories

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C.

This is the ideal (Maximum) lumen. This lumen information is from the LED supplier


*3. LUMEN(system) (Total FLUX) : this lumen is from luminaire with heat sink, reflector and fixture, this is the real lumen with the loss because of different design of reflectors and fixtures.

Photometric


CRI80 15°

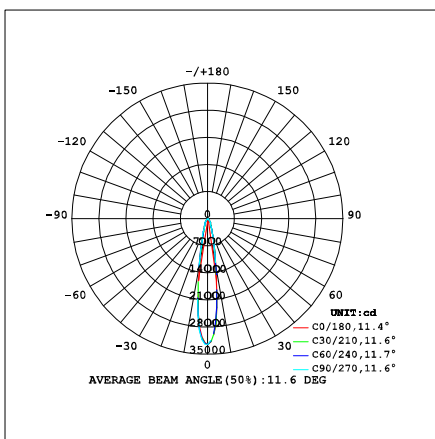


3000K

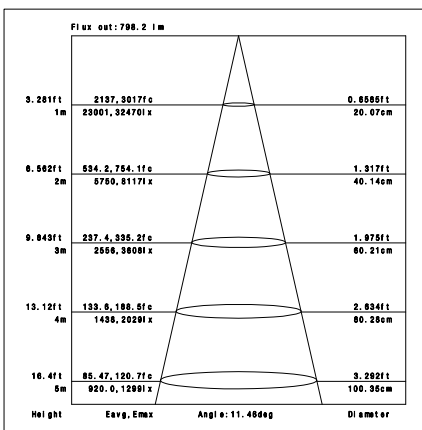


4000K

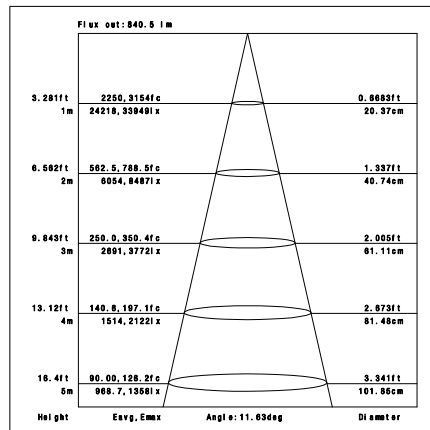


CRI80 20°

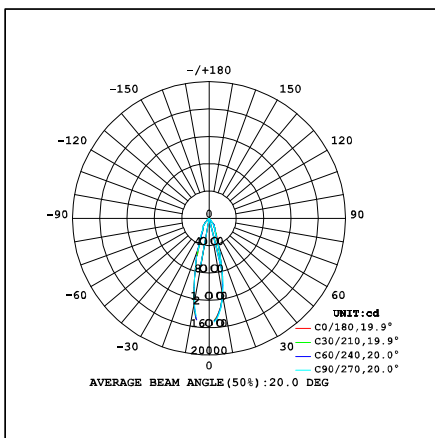


3000K

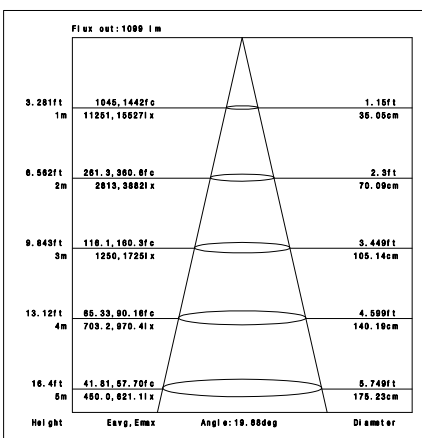


4000K

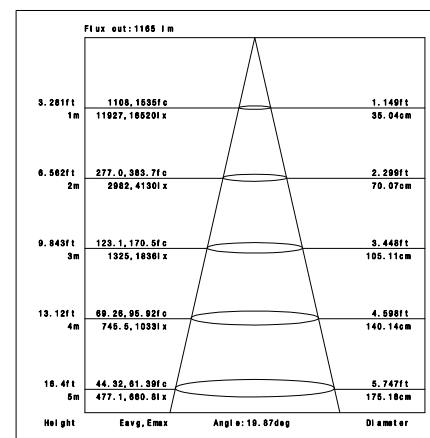


CRI80 36°

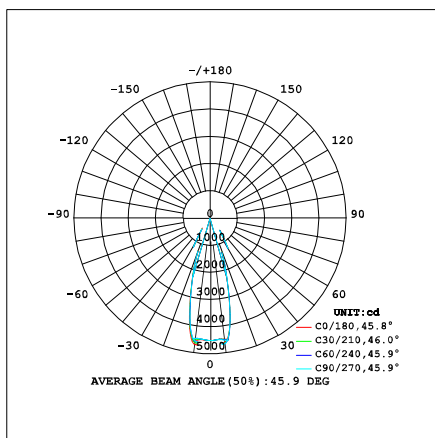




3000K

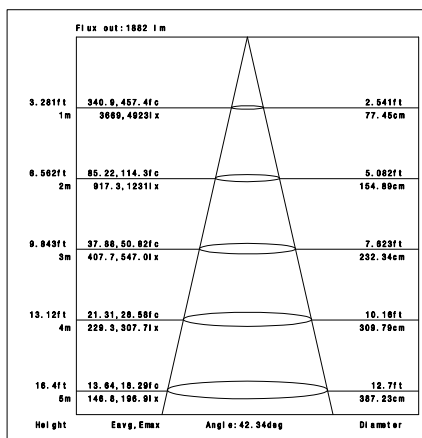




4000K

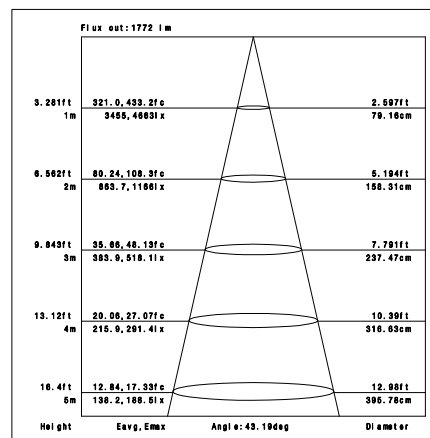


Adaptor installation diagram

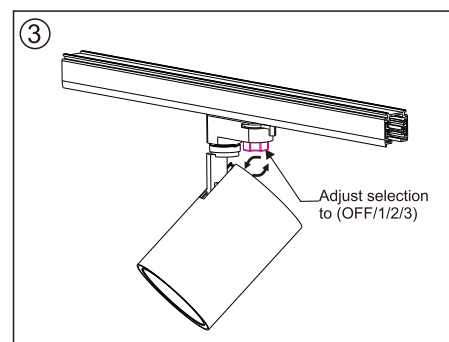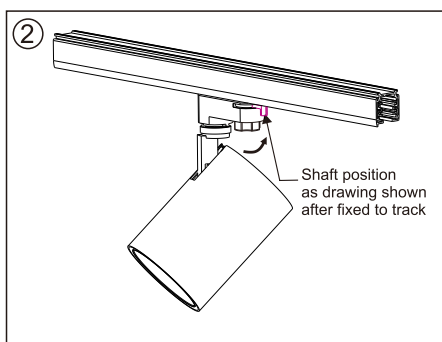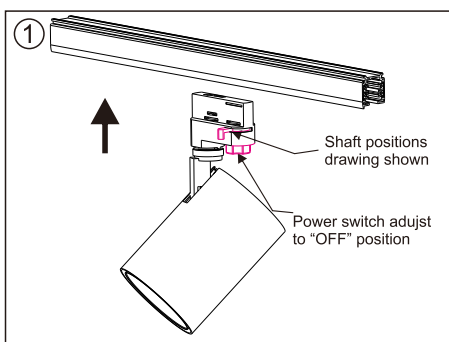

Adaptor disassembly diagram

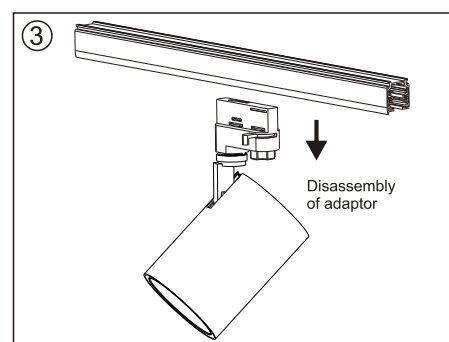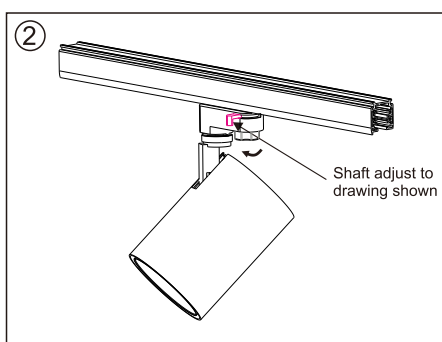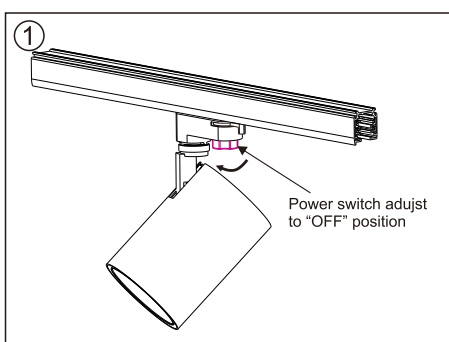

Installation Accessories



TRACK



X connector



Surface mounting kit



Straight connector



Live connector



T connector



L connector



End cap





Quick T-BAR



Suspension cable

Packaging:

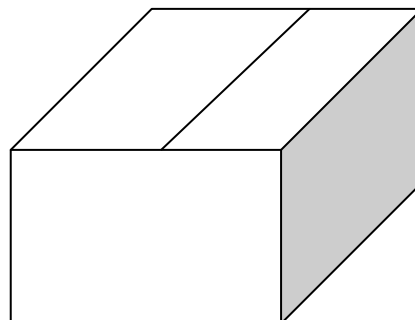

Box
135x135x305mm
1pc/box
GW: 1.2kg/box

Outer carton
425x425x325mm
9pcs/CTN
GW: 16.5kg/carton

Applications:

Widely applied for accent lighting or wall washer in retail shops, galleries, museum or any other interior lighting.



fashion



home store



department store



automotive



consumer
electronics



food