

LUMIWISE®

LUMIMAXX

Downlight series

LUMIWISE®

SHENZHEN LUMIWISE LIGHTING CO.,LTD

www.lumiwise-lighting.com
sales@lumiwise-lighting.com

Tel:0086 (0)755 27200651
Fax:0086 (0)755 2720-671

Floor 2 ,Sen Hai Nuo,Innovative Square ,Wai Huan Road NO.5,
Shi Long Zai community,Shi Yan Town,Bao'an District ,
Shenzhen City,G.D.China



Concept&design by Lumwise lighting

All of information is subject to change without notice
Lumwise lighting CO.,LTD @All rights reserved

LIGHTING CATALOGUE 2022 V1.0

LUMIMAXX

Downlight series





Round



DP090R

90
15° /24° /38° /60°
14W &350m A



DP125R

125
15° /24° /38° /60°
24W &600m A



DP145R

145
15° /24° /38° /60°
32W &800m A



DP165R

165
15° /24° /38° /60°
42W &1050m A

Square



DP090S

90x90
15° /24° /38° /60°
14W &350m A



DP125S

125x125
15° /24° /38° /60°
24W &600m A



DP145S

145x145
15° /24° /38° /60°
32W &800m A




DP165S

165x165
15° /24° /38° /60°
42W &1050m A

Round or square,4 dif ferent sizes, you can
always find the most suitable model for your ceiling



Round or square,4 dif ferent sizes, you can always find the most suitable model for your ceiling

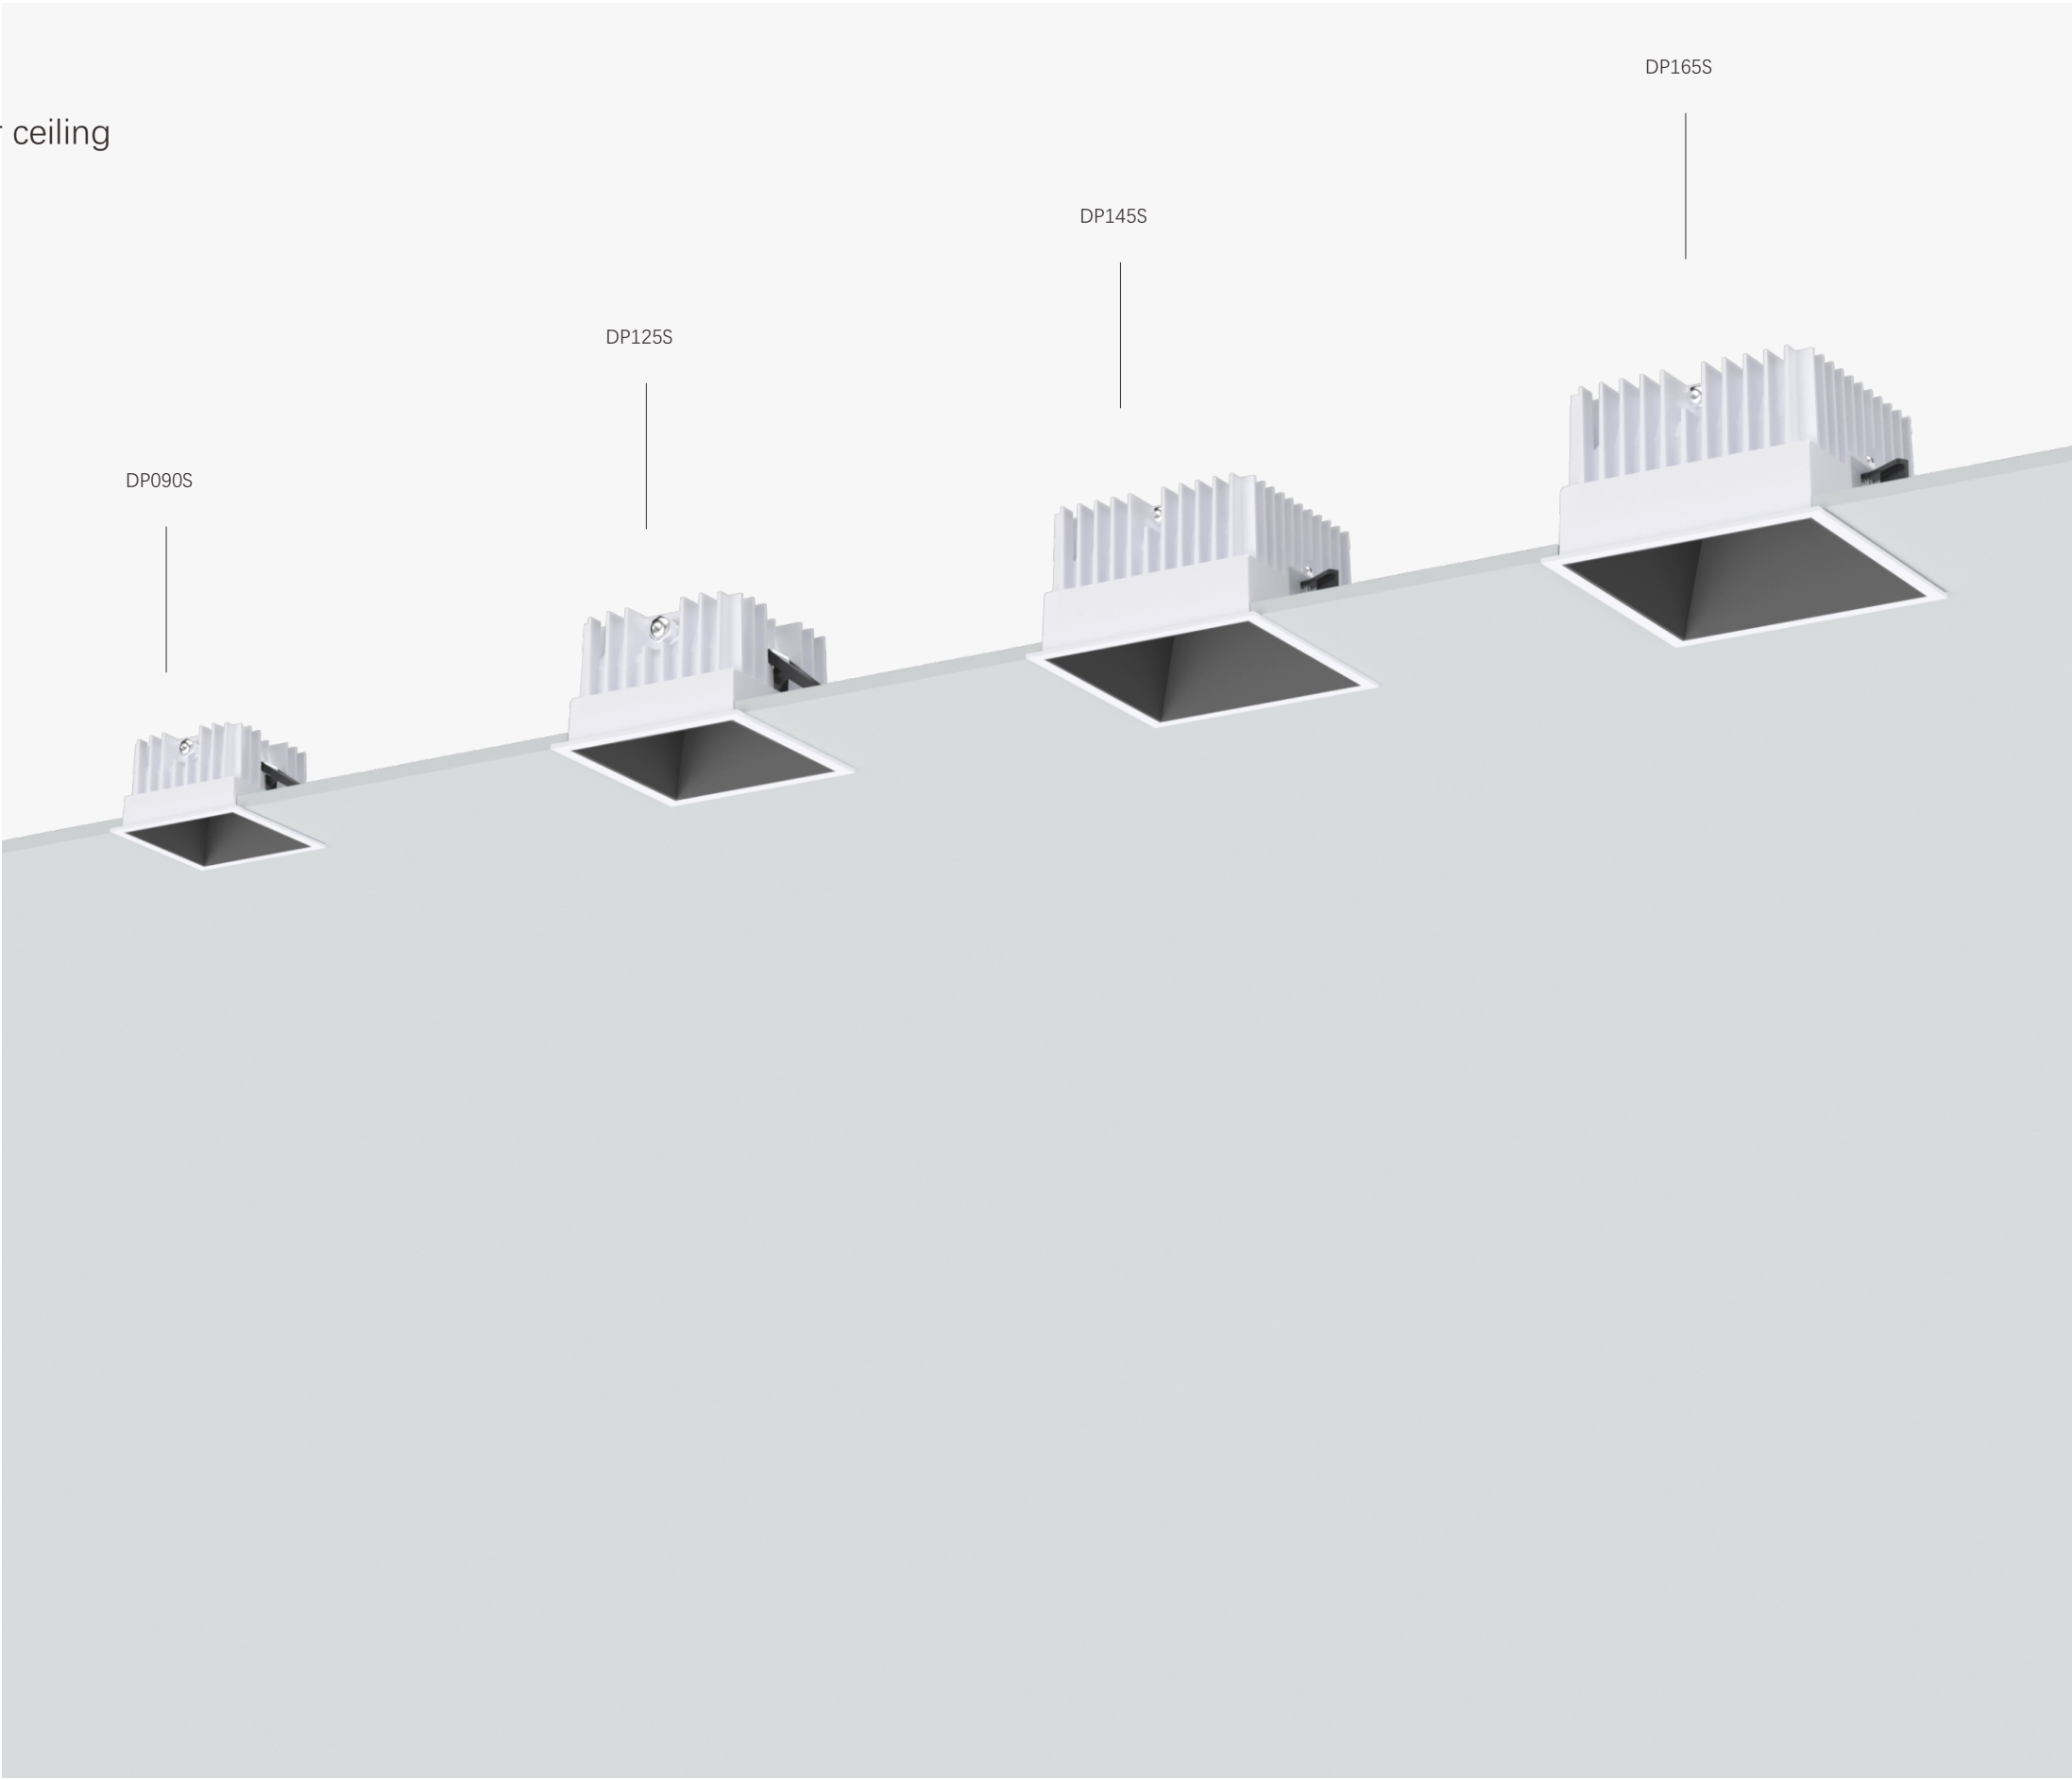




DP090R

31°

XXXXX

15°

Designed with the cut-off angle of 31° to keep light out of the sight, considering human's line of vision and elevation angle.

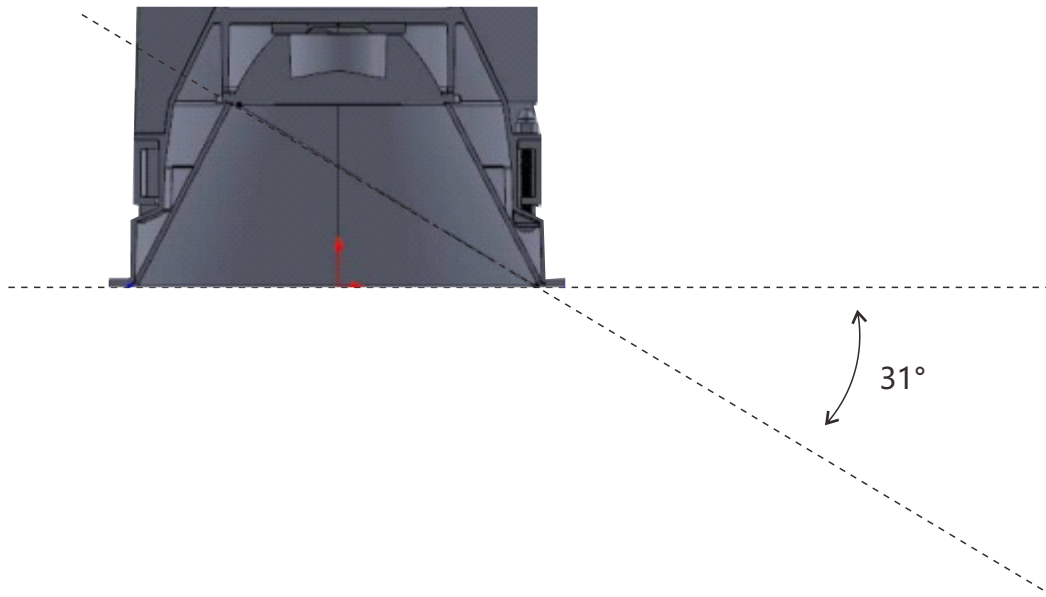



18°

24°


38°

60°

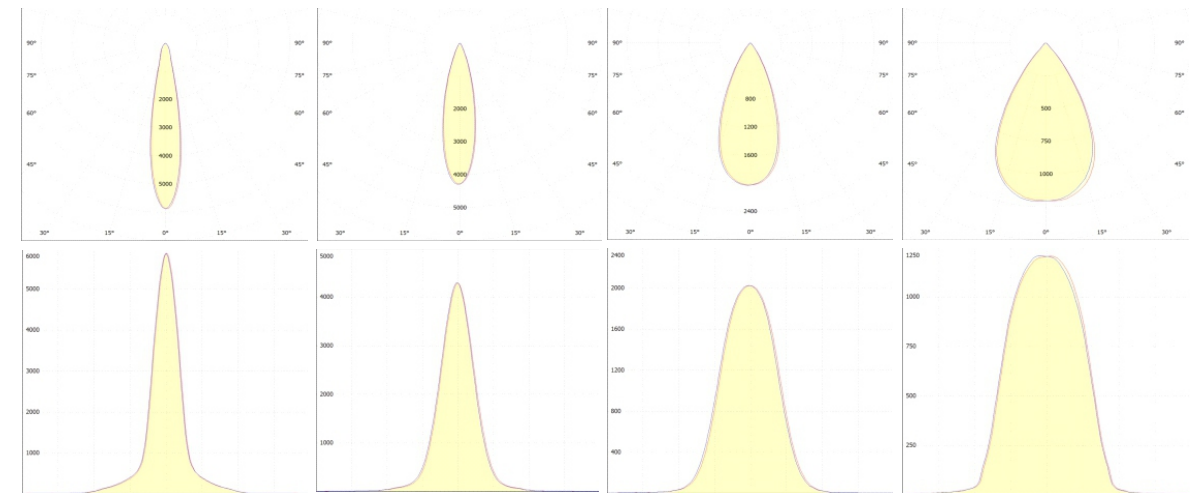


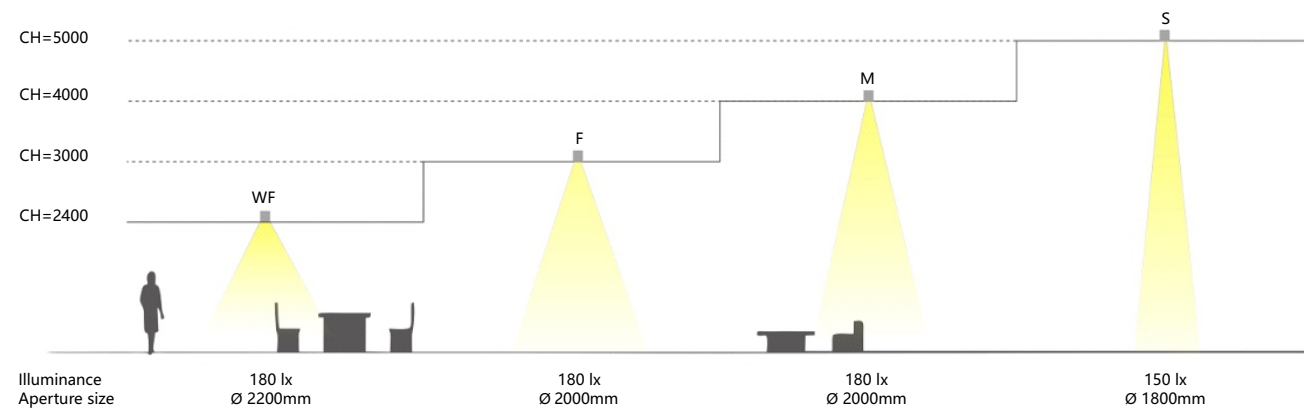


DP090R/S

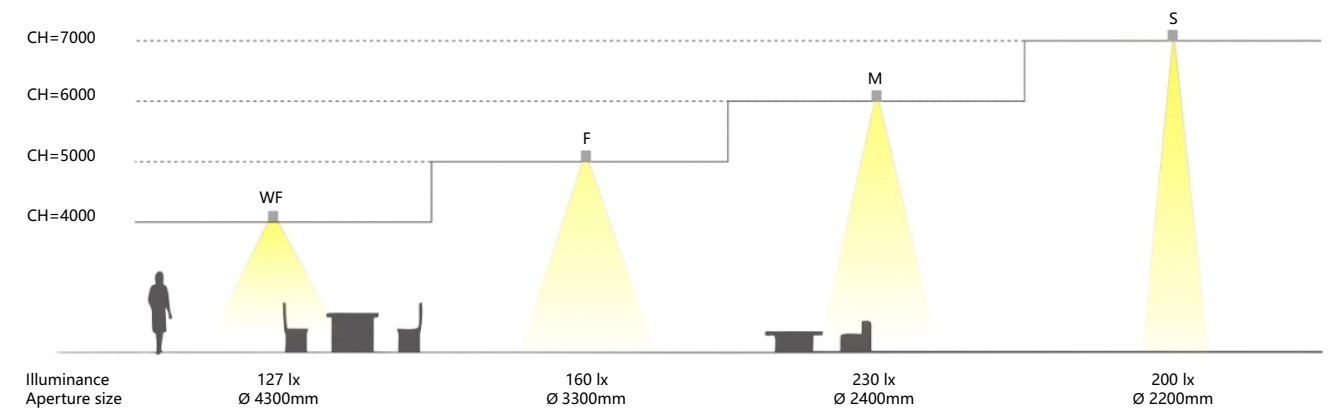


DP145R/S

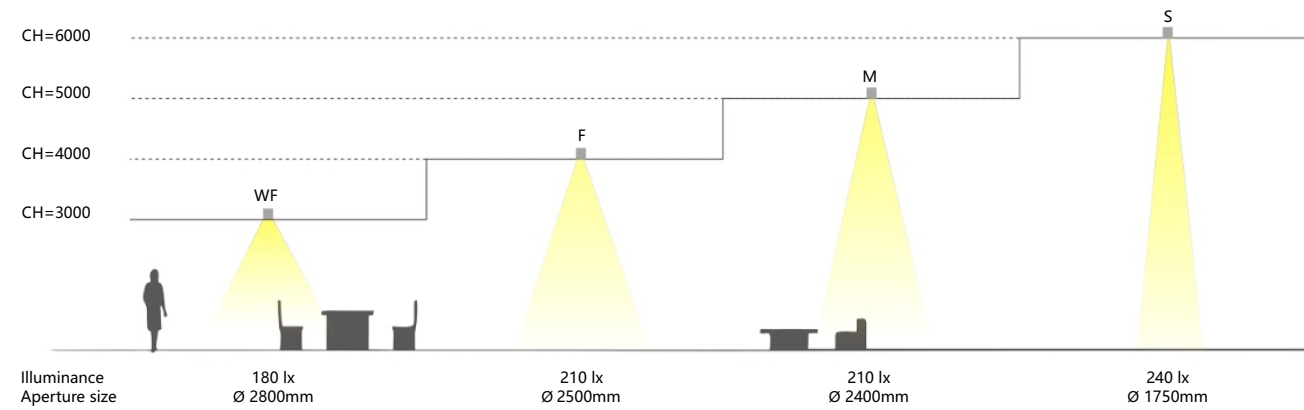

DP125R/S

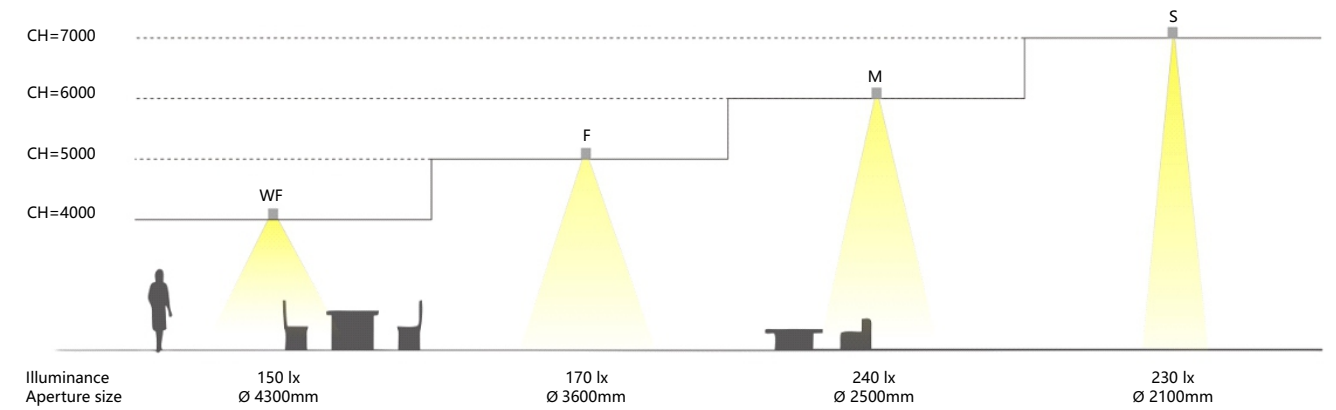

DP165R/S





Black



Silver

White



Gold




Considering the reflection of light, we can select different anti-glare covers according to your design, to create a better lighting atmosphere and definite your own art of life.

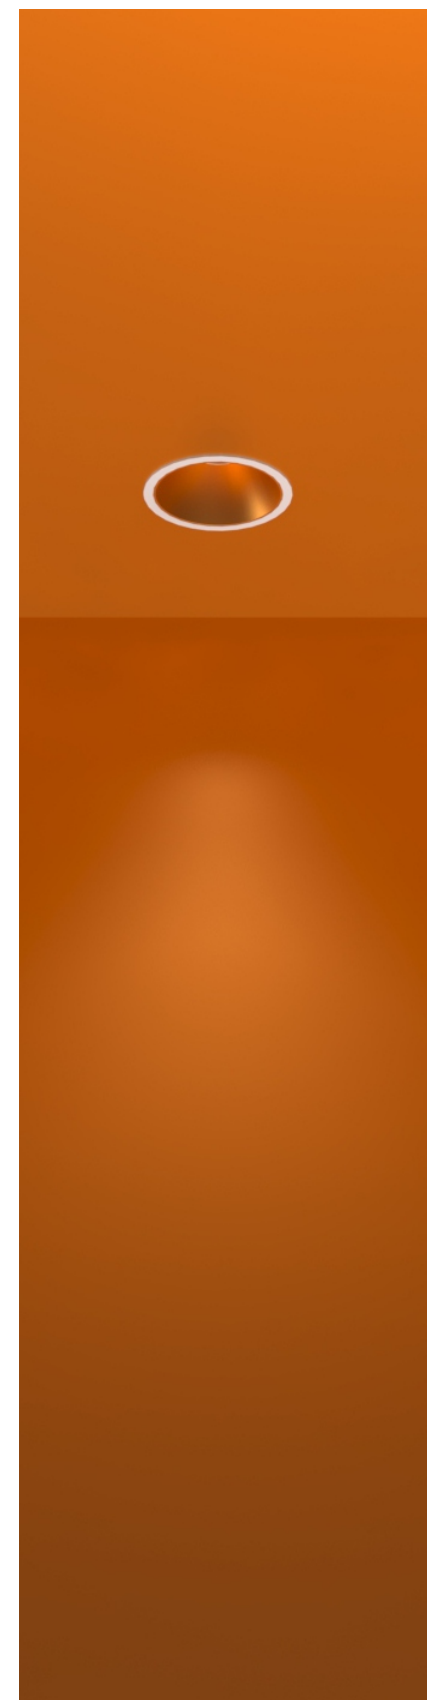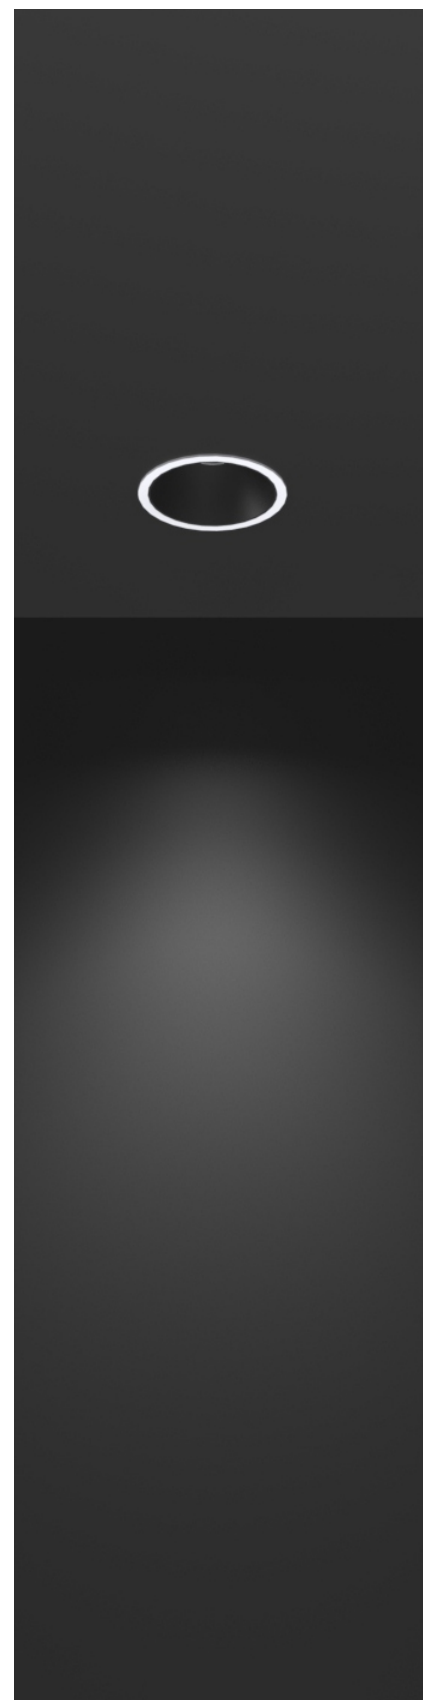

IP54

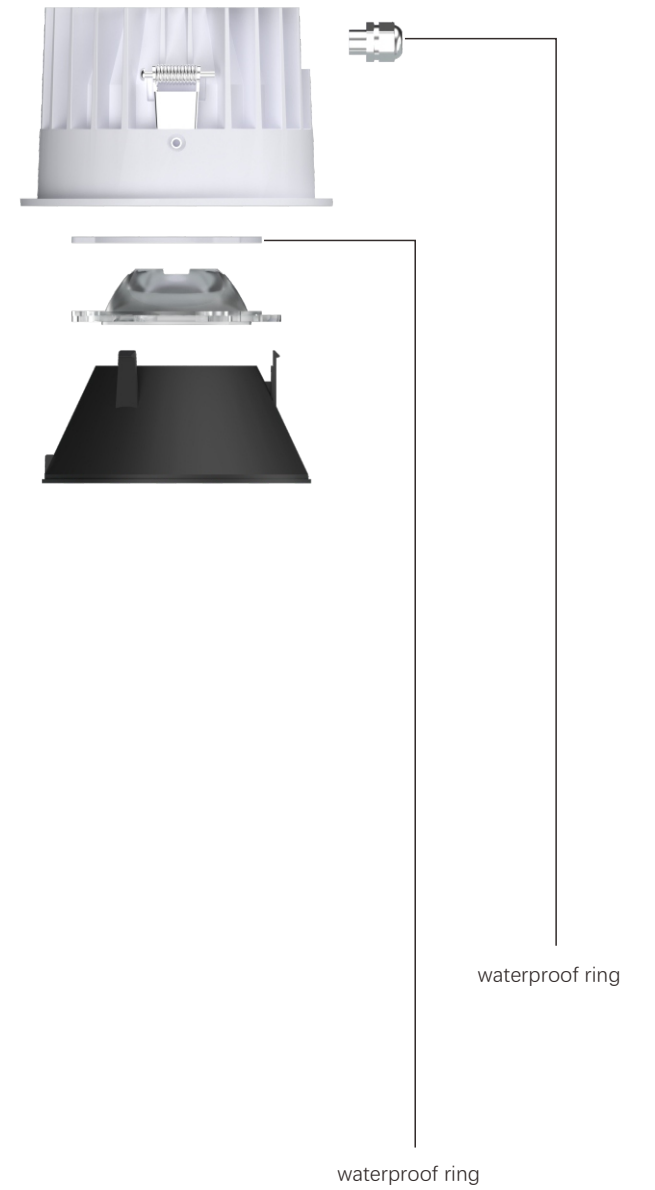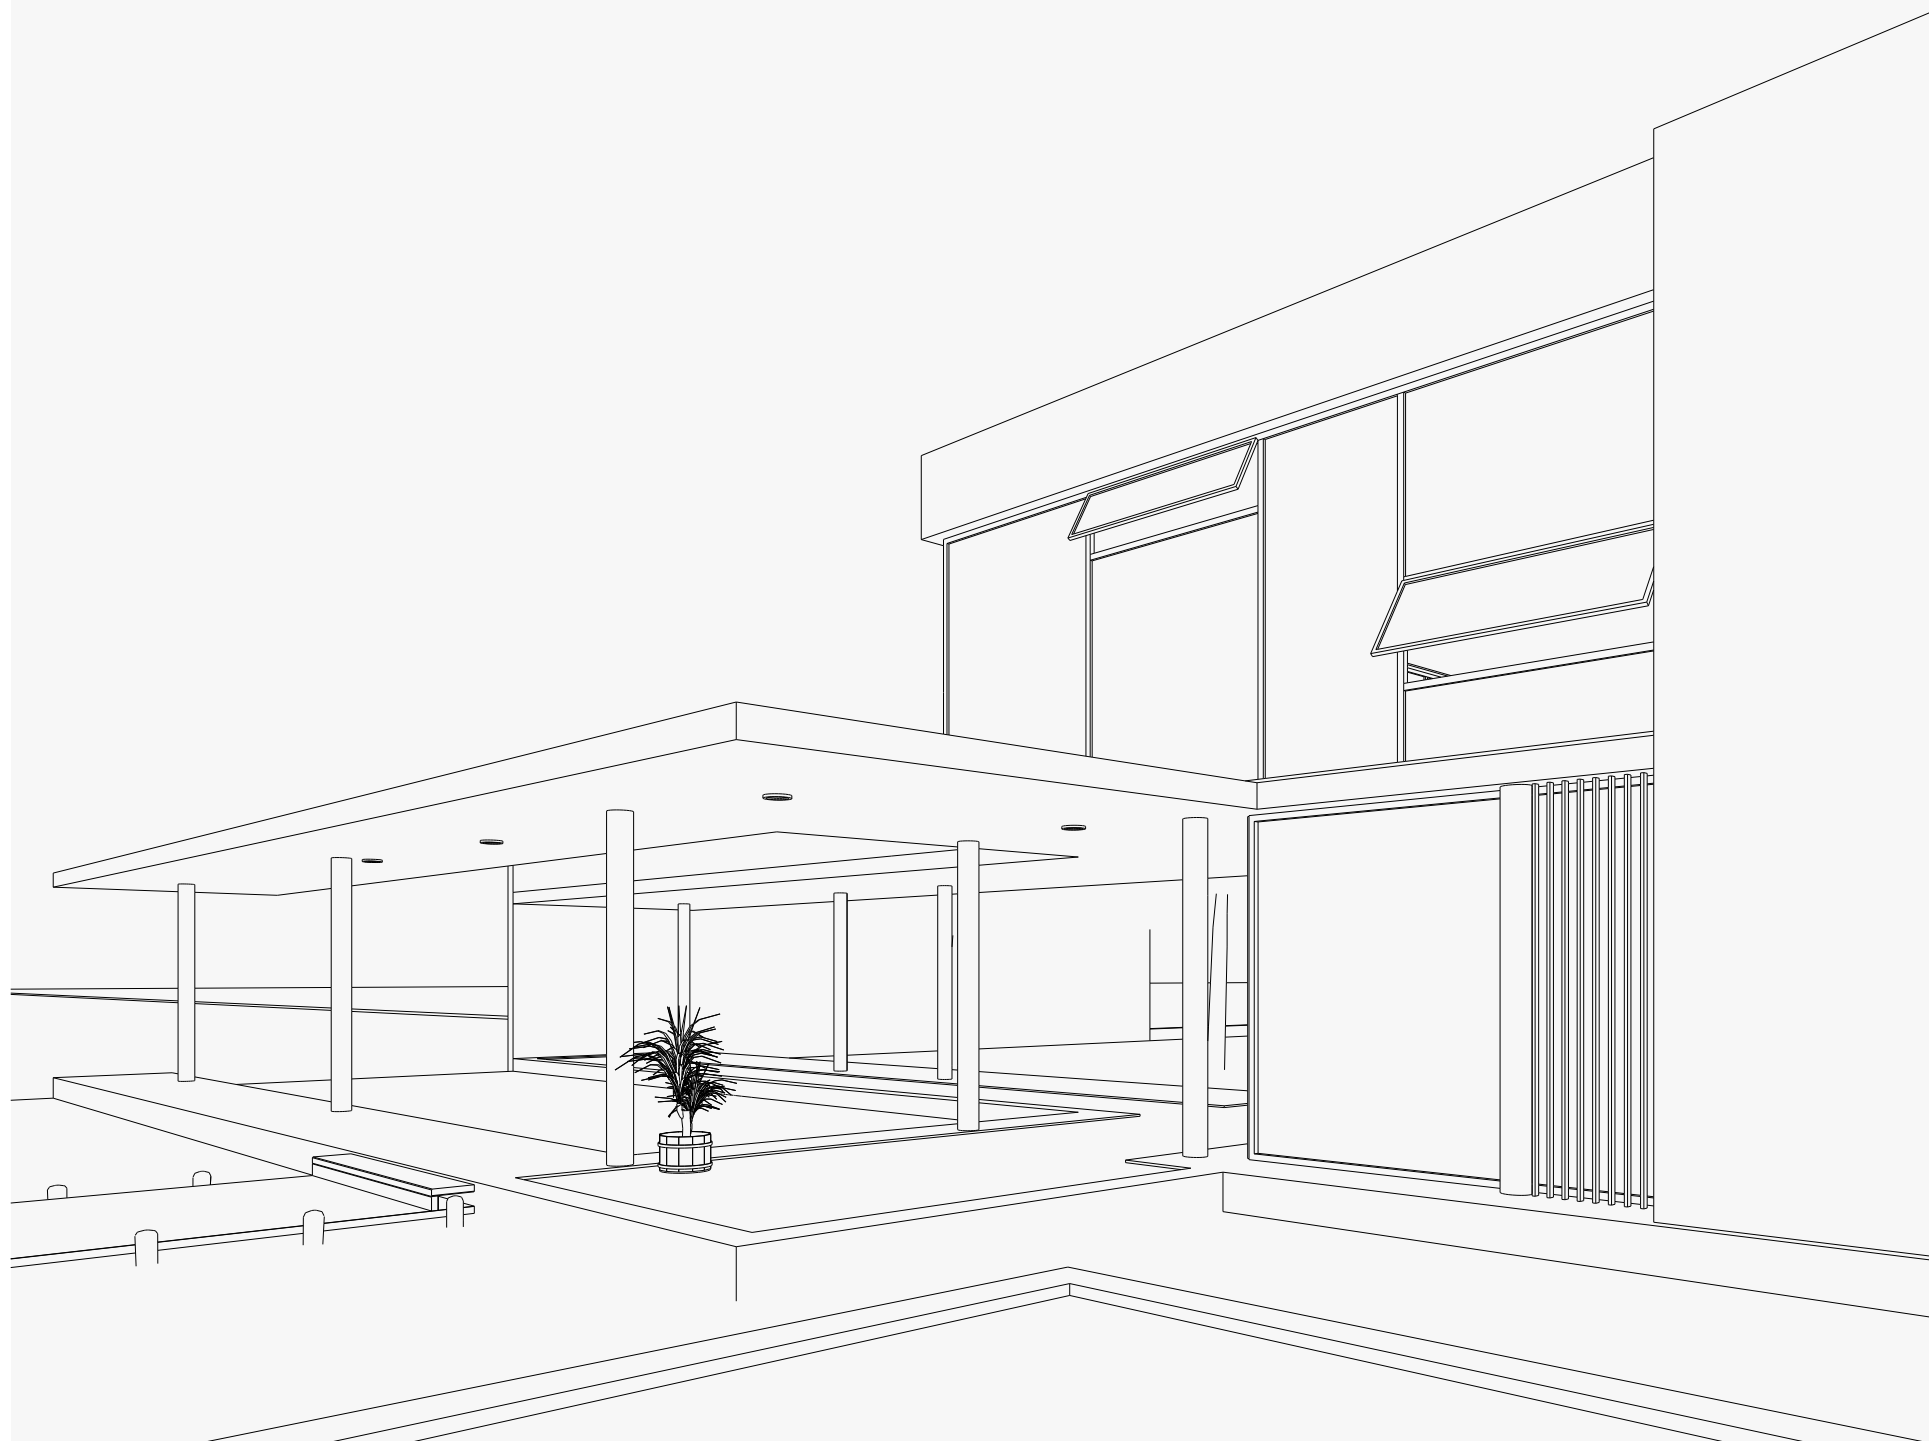

Rich line up of IP54 allows continuous spatial design from interior to under-eaves




DP090R


14W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	18°	1148 lm	4000K	DP090R-14G40-S01
		1115 lm	3000K	DP090R-14G30-S01
		1059 lm	2700K	DP090R-14G27-S01
	28°	1224 lm	4000K	DP090R-14G40-M01
		1189 lm	3000K	DP090R-14G30-M01
		1129 lm	2700K	DP090R-14G27-M01
	38°	1218lm	4000K	DP090R-14G40-F01
		1183 lm	3000K	DP090R-14G30-F01
		1123 lm	2700K	DP090R-14G27-F01
50°		1289 lm	4000K	DP090R-14G40-WF01
		1252 lm	3000K	DP090R-14G30-WF01
		1189 lm	2700K	DP090R-14G27-WF01

Input Voltage (v): 220-240V
Dimming: On/Off,TRIAC,1-10V,DALI
Light source: COB LED
luminaire Lifetime: 50,000h(L80B50, T a25° C)
IP Rating: 54
Working Temperature (°C): -5 ~ +30
Material: Aluminium
Fitting Colors: Sandy White / Sandy Black



Weight:13KG
Packaging: 455x295x288mm, 24pcs /CTN




DP125R



24W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	18°	1958 lm	4000K	DP125R-24G40-S01
		1901 lm	3000K	DP125R-24G30-S01
		1805 lm	2700K	DP125R-24G27-S01
	28°	2030 lm	4000K	DP125R-24G40-M01
		1971 lm	3000K	DP125R-24G30-M01
		1872 lm	2700K	DP125R-24G27-M01
	38°	2087lm	4000K	DP125R-24G40-F01
		2027 lm	3000K	DP125R-24G30-F01
		1925 lm	2700K	DP125R-24G27-F01
50°		2070 lm	4000K	DP125R-24G40-WF01
		2010 lm	3000K	DP125R-24G30-WF01
		1909 lm	2700K	DP125R-24G27-WF01

Input Voltage (v): 220-240V
Dimming: On/Off,TRIAC,1-10V,DALI
Light source: COB LED
luminaire Lifetime: 50,000h(L80B50, T a25° C)
IP Rating: 54
Working Temperature (°C): -5 ~ +30
Material: Aluminium
Fitting Colors: Sandy White / Sandy Black



Weight:13KG
Packaging: 455x295x288mm, 24pcs /CTN




Cut hole: Ø 145mm

DP145R


32W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	18°	2490 l m	4000K	DP145R-32G40-S01
		2418 l m	3000K	DP145R-32G30-S01
		2297 l m	2700K	DP145R-32G27-S01
	24°	2853 l m	4000K	DP145R-32G40-M01
		2770 l m	3000K	DP145R-32G30-M01
		2631 l m	2700K	DP145R-32G27-M01
	38°	2748 l m	4000K	DP145R-32G40-F01
		2668 l m	3000K	DP145R-32G30-F01
		2534 l m	2700K	DP145R-32G27-F01
56°		2969 l m	4000K	DP145R-32G40-W F01
		2883 l m	3000K	DP145R-32G30-W F01
		2738 l m	2700K	DP145R-32G27-W F01

Input Voltage (v): 220-240V
Dimming: On/Off,TRIAC,1-10V,DALI
Light source: COB LED
luminaire Lifetime: 50,000h(L80B50, T a25° C)
IP Rating: 54
Working Temperature (°C): -5 ~ +30
Material: Aluminium
Fitting Colors: Sandy White / S andy Black



Weight:16KG
Packaging: 330x405x355mm, 12pcs /CTN




Cut hole: Ø 165mm

DP165R


40W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	18°	2855 l m	4000K	DP165R-40G40-S01
		2772 l m	3000K	DP165R-40G30-S01
		2633 l m	2700K	DP165R-40G27-S01
	24°	3150 l m	4000K	DP165R-40G40-M01
		3059 l m	3000K	DP165R-40G30-M01
		2906 l m	2700K	DP165R-40G27-M01
	38°	3370 l m	4000K	DP165R-40G40-F01
		3272 l m	3000K	DP165R-40G30-F01
		3108 l m	2700K	DP165R-40G27-F01
56°		3199 l m	4000K	DP165R-40G40-W F01
		3106 l m	3000K	DP165R-40G30-W F01
		2950 l m	2700K	DP165R-40G27-W F01

Input Voltage (v): 220-240V
Dimming: On/Off,TRIAC,1-10V,DALI
Light source: COB LED
luminaire Lifetime: 50,000h(L80B50, T a25° C)
IP Rating: 54
Working Temperature (°C): -5 ~ +30
Material: Aluminium
Fitting Colors: Sandy White / S andy Black



Weight:17KG
Packaging: 590x445x206mm, 10pcs /CTN




DP145S



32W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	18°	2490 l m	4000K	DP145S-32G40-S01
		2418 l m	3000K	DP145S-32G30-S01
		2297 l m	2700K	DP145S-32G27-S01
	24°	2853 l m	4000K	DP145S-32G40-M01
		2770 l m	3000K	DP145S-32G30-M01
		2631 l m	2700K	DP145S-32G27-M01
	38°	2748 l m	4000K	DP145S-32G40-F01
		2668 l m	3000K	DP145S-32G30-F01
		2534 l m	2700K	DP145S-32G27-F01
	56°	2969 l m	4000K	DP145S-32G40-W F01
		2883 l m	3000K	DP145S-32G30-W F01
		2738 l m	2700K	DP145S-32G27-W F01

Input Voltage (v): 220-240V
Dimming: On/Off,TRIAC,1-10V,DALI
Light source: COB LED
luminaire Lifetime: 50,000h(L80B50, T a25° C)
IP Rating: 54
Working Temperature (°C): -5 ~ +30
Material: Aluminium
Fitting Colors: Sandy White / S andy Black



Weight:16KG
Packaging: 330x405x355mm, 12pcs /CTN




DP165S


40W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	18°	2855 l m	4000K	DP165S-40G40-S01
		2772 l m	3000K	DP165S-40G30-S01
		2633 l m	2700K	DP165S-40G27-S01
	24°	3150 l m	4000K	DP165S-40G40-M01
		3059 l m	3000K	DP165S-40G30-M01
		2906 l m	2700K	DP165S-40G27-M01
	38°	3370 l m	4000K	DP165S-40G40-F01
		3272 l m	3000K	DP165S-40G30-F01
		3108 l m	2700K	DP165S-40G27-F01
	56°	3199 l m	4000K	DP165S-40G40-W F01
		3106 l m	3000K	DP165S-40G30-W F01
		2950 l m	2700K	DP165S-40G27-W F01

Input Voltage (v): 220-240V
Dimming: On/Off,TRIAC,1-10V,DALI
Light source: COB LED
luminaire Lifetime: 50,000h(L80B50, T a25° C)
IP Rating: 54
Working Temperature (°C): -5 ~ +30
Material: Aluminium
Fitting Colors: Sandy White / S andy Black



Weight:14KG
Packaging: 590x445x206mm, 10pcs /CTN




DP090S


14W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	18°	1148 lm	4000K	DP090S-14G40-S01
		1115 lm	3000K	DP090S-14G30-S01
		1059 lm	2700K	DP090S-14G27-S01
	28°	1224 lm	4000K	DP090S-14G40-M01
		1189 lm	3000K	DP090S-14G30-M01
		1129 lm	2700K	DP090S-14G27-M01
	38°	1218lm	4000K	DP090S-14G40-F01
		1183 lm	3000K	DP090S-14G30-F01
		1123 lm	2700K	DP090S-14G27-F01
	50°	1289 lm	4000K	DP090S1-14G40-W F0
		1252 lm	3000K	DP090S-14G30-W F01
		1189 lm	2700K	DP090S-14G27-W F01

Input Voltage (v): 220-240V
Dimming: On/Off,TRIAC,1-10V,DALI
Light source: COB LED
luminaire Lifetime: 50,000h(L80B50, T a25° C)
IP Rating: 54
Working Temperature (°C): -5 ~ +30
Material: Aluminium
Fitting Colors: Sandy White / S andy Black



Weight:12KG
Packaging: 465x295x288mm, 24pcs /CTN




DP125S

24W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	18°	1958 lm	4000K	DP125S-24G40-S01
		1901 lm	3000K	DP125S-24G30-S01
		1805 lm	2700K	DP125S-24G27-S01
	28°	2030 lm	4000K	DP125S-24G40-M01
		1971 lm	3000K	DP125S-24G30-M01
		1872 lm	2700K	DP125S-24G27-M01
	38°	2087lm	4000K	DP125S-24G40-F01
		2027 lm	3000K	DP125S-24G30-F01
		1925 lm	2700K	DP125S-24G27-F01
	50°	2070 lm	4000K	DP125S-24G40-W F01
		2010 lm	3000K	DP125S-24G30-W F01
		1909 lm	2700K	DP125S-24G27-W F01

Input Voltage (v): 220-240V
Dimming: On/Off,TRIAC,1-10V,DALI
Light source: COB LED
luminaire Lifetime: 50,000h(L80B50, T a25° C)
IP Rating: 54
Working Temperature (°C): -5 ~ +30
Material: Aluminium
Fitting Colors: Sandy White / S andy Black



Weight:16KG
Packaging: 475x370x365mm, 20pcs /CTN