


3D BEND 3D1010

NEW




10mm wide luminous surface with top and side bending, ideal for versatile indoor, outdoor, and architectural lighting, meeting various installation needs. Tri-color silicone extrusion with a clear window for easy cutting. Dust-resistant matte finish ensures a clean look with uniform, natural light. 5 years warranty, lifespan ≥ 50,000 hours, 1 Bin.



Light Distribution Curve (24V, 10W, 4000K)

Dimensions

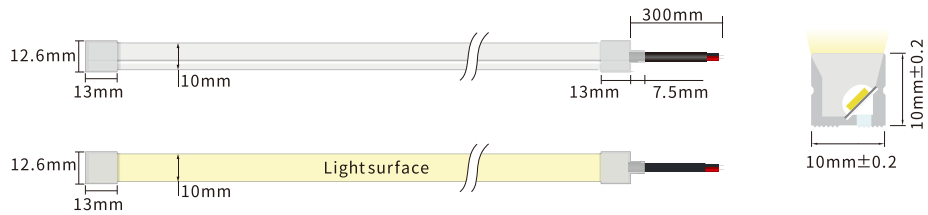

Basic Parameters

Model No.	NS-3D1010
Voltage	DC24V
Power(w/m)	5w/10w
Storage Temperature	-25°C ~60 °C
Ambient Temperature	Tamin=-25 °C , Tamax=-50 °C



Single Color

Voltage	DC24 V
Circuit Design	CV
Power(w/m)	5w/10w
Max. Run Length	5m
CuttingLength	35.7mm

Parameters

CRI	CCT	lm/m	w/m	lm/w
>90	2700K±150	464	10	46.4
	3000K±150	486	10	48.6
	3500K±200	491	10	49.1
	4000K +400 -200	506	10	50.6
	5000K +500 -300	506	10	50.6
	6500K +200 -600	493	10	49.3
	Red	168	10	16.8
--	Green	445	10	44.5
	Blue	95	10	9.5
	Yellow	110	10	11.0
	Orange	147	10	14.7
	Pink	371	10	37.1

- Note:
- CV: Constant Voltage CC: Constant Current.
 - Max. Run length refers to single side feed in serial connection.
 - The given color temperature is the temperature of finished products.
 - The given data are typical values. Due to tolerances of the production process and the electrical components, testing parameters can vary up to 10%.
 - The Constant Current version supports PWM dimming, but the PWM frequency must be kept below 2kHz.



End Cap & Cable Lead Option

Silicone End Cap (IP67)



Integral End Cap (IP67)



Accessories

