




Features& Benefits

- High efficacy of more than 150LM/W.
- Fast installation and easy maintenance.
- EN12464-1 compliant.
- Shining free and uniform light.
- Dot free illumination and screwless end cap.
- Powergear 3-Phase adaptor



Specifications

Optical

• Lumen	3200lm@1200mm 4000lm@1500mm	• CCT	3000K,3500K,4000K,3000-6500K
		• SDCM	<3
		• CRI	90Ra
		• Beam angle	80° ↓

Electrical

• Input Voltage	200-240V, 120-270V	• Efficiency	150lm/w@90Ra
• Power Consumption	21W/ 30W@1200mm 60W/ 80W@1200mm	• THD	<10%
		• Power Factor	0.95


System

• Lifespan	50000H(L90/B10)	• Size	1200mm,1500mm
• Operating Temperature	-25°C to +40°C	• Color	Black(RAL9005),White(RAL9016)
• Protection	IP40/IK08	• Warranty	5years

Application

Office,Education,Communication area ,retail,general lighting

Dimension

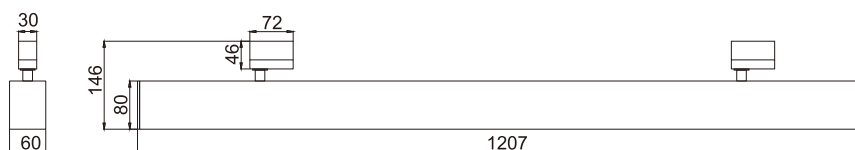

Applications:

Widely applied for general lighting in large interior space in retail shops, galleries, museum or any other interior lighting.



fashion



home store



department store



automotive

consumer
electronics

food

