


LUMIWISE[®]


LED LINEAR LIGHT SPECIFICATION

LUMILENA Linear Light **Individual Linear Light**

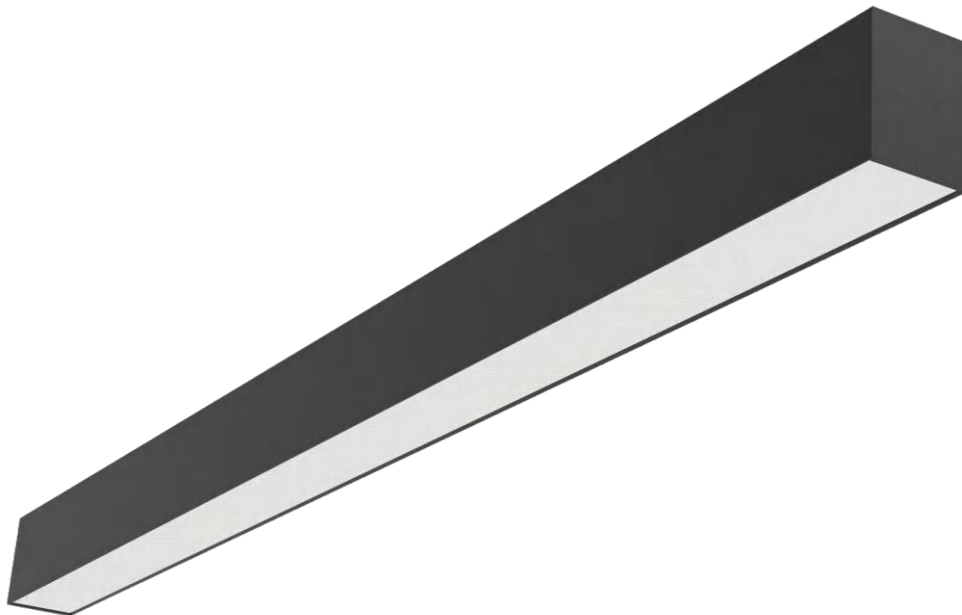

Note: Lumiwise may change product specifications and installation guidance without prior notice.

LUMILENA Series

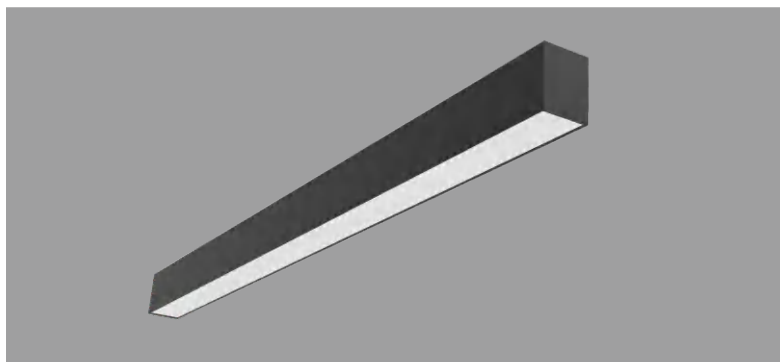

Discreet and timeless pendant light with direct or direct/indirect light emission.
 Aluminum profile powder-coated in white and black.
 Highly efficient lighting system with optimal light control.
 Available in anti-glare or efficiency-optimized versions.
 Excellent for office areas ($UGR \leq 19$) with Microprismatic diffuser
 Available in individual light colors as well as freely adjustable light colors,
 making them ideal for modern interior lighting design.


Features& Benefits

- 1.2mm thickness Aluminum Profile with width 60mm and height 75mm
- High efficacy of more than 140LM/W.
- Seamless connection without light leakage.
- Fast installation and easy maintenance.
- EN12464-1 compliant.
- Shining free and uniform light.
- Dot free illumination and screwless end cap.




DIMENSIONS

Front view

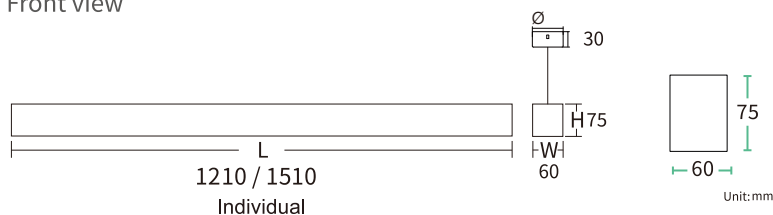

PHOTOMETRIC DATA

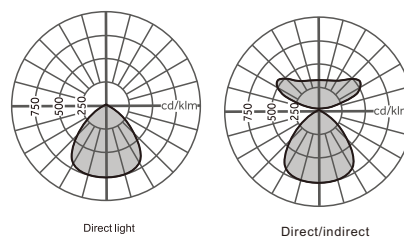

Luminaire Parameters (Data tested by ies)

Item Code	LN60801201ES		LN60801501ES		LN60803001ES	
Size	1147*60*80mm		1432*60*80mm		3032*60*80mm	
Efficacy			140lm/W-150lm/W			
UGR			UGR<19 (Microprismatic) ,UGR<22 (Opal Diffuser)			
Diffuser material			Diffuser/ Micro Prismatic			
Lumens	3200lm (Direct Light)	1900lm ↑ +2900lm ↓ (Indirect 40%+Direct 60%)	4000lm (Direct Light)	2400lm ↑ +3600lm ↓ (Indirect 40%+Direct 60%)	8000lm (Direct Light)	4800lm ↑ +7200lm ↓ (Indirect 40%+Direct 60%)
Typ.power	21W	32W	27W	40W	53W	80W
CCT			3000K/4000K/3000-6500K			
CRI			>80 (90 optional)			
Beam angle			Direct & Indirect/direct			
Input voltage			200-240VAC 50Hz/60Hz			
Linkable			YES			
Power factor			>0.9			
Power Supply			BOKE /TRIDONIC Driver			
Dimming			On/off or DALI			
Color			 RAL 9016 RAL 9005			
Installation			Ceiling Surface mouted/Pendant/Recessed			
Warranty			5 years			
Certifications			CE/RoHS			

ACCESSORIES

IMAGE	MODEL NO.	RECOMMENDED QTY WHEN JOINED
FOR SURFACE MOUNTED AND SUSPENDED USE		
	000001B MOUNTING CLIPS	Mounting point @ every 1.5m
	000001CAP END CAP BK	One for each end
	000002CAP END CAP WH	
	OPAL DIFFUSER	Add connecting lengths together to get the correct cutting run
	PRISMATIC DIFFUSER	
FOR SUSPENDED USE		
	SUSPENSION KIT	Mounting point @ every 1.5m
	3 CORE POWER CABLE	One power feed, standard length 1.5m, longer lengths are available on request
	5 CORE POWER CABLE (FOR DALI DIM)	
	CEILING BOX BK	One  H30mm 60mm
	CEILING BOX WH	
OPTIONAL FOR SUSPENDED USE		
	120 Up Light MODULE	1.2m length
	150 UP Light MODULE	1.5m length

Package

Package	Product Size (mm)	Carton L (cm)	Carton W (cm)	Carton H (cm)	Total Volume (CBM)	G.W (KG)	G.W (KG)	Volume weight
4pcS/carton	1200mm	137	37	15	0.076	13	12	15.207
	1500mm	163	37	15	0.090	17	12	18.093

Applications:

Office ,school ,airport or other commercial lighting