
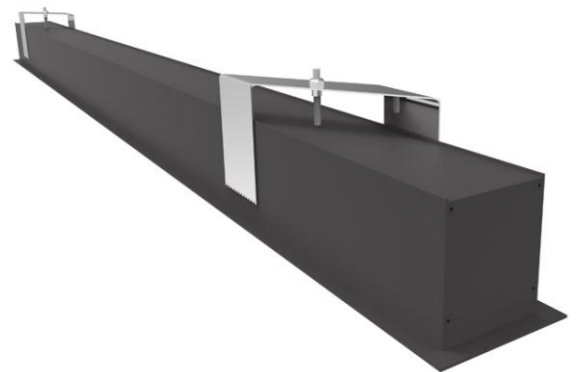


LUMIWISE[®]

LED LINEAR LIGHT SPECIFICATION

LUMILENA PRO Linear Light Recessed

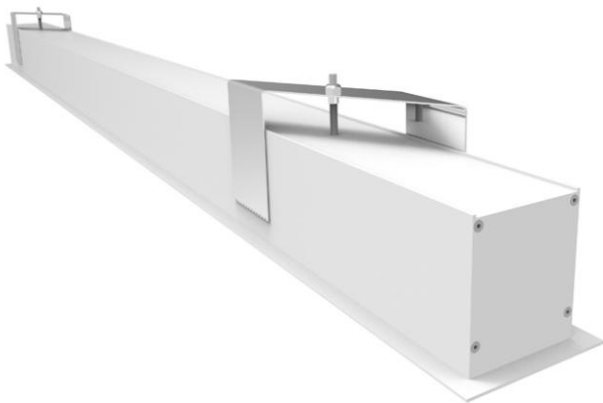

Note: Lumiwise may change product specifications and installation guidance without prior notice.

LUMILENA PRO Recessed






Features& Benefits

- High efficacy of more than 140LM/W.
- Seamless connection without light leakage.
- Fast installation and easy maintenance.
- EN12464-1 compliant.
- Shining free and uniform light.
- Dot free illumination and screwless endcap.




Dimension

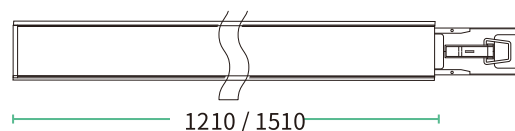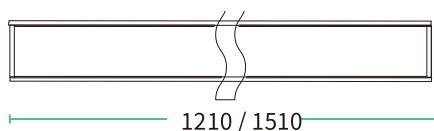

Luminaire Parameters (Data tested by ies)

Item Code	LN60801201CR		LN60801501CR		LN6080301CR	
Size	1147*60*80mm		1432*60*80mm		3032*60*80mm	
Efficacy			140lm/W-150lm/W			
UGR			UGR<19 (Microprismatic) ,UGR<22 (Opal Diffuser)			
Diffuser material			Diffuser/ Micro Prismatic			
Lumens	3200lm (Direct Light)	1900lm ↑ +2900lm ↓ (Indirect 40%+Direct 60%)	4000lm (Direct Light)	2400lm ↑ +3600lm ↓ (Indirect 40%+Direct 60%)	8000lm (Direct Light)	4800lm ↑ +7200lm ↓ (Indirect 40%+Direct 60%)
Typ.power	21W	32W	27W	40W	53W	80W
CCT			3000K/4000K/3000-6500K			
CRI			>80 (90 optional)			
Beam angle			Direct & Indirect/direct			
Input voltage			200-240VAC 50Hz/60Hz			
Linkable			YES			
Power factor			>0.9			
Power Supply			BOKE /TRIDONIC Driver			
Dimming			On/off or DALI			
Color			  RAL 9016 RAL 9005			
Installation			Ceiling Surface mouted/Pendant/Recessed			
Warranty			5 years			
Certifications			CE/RoHS			

Continuous Connction System

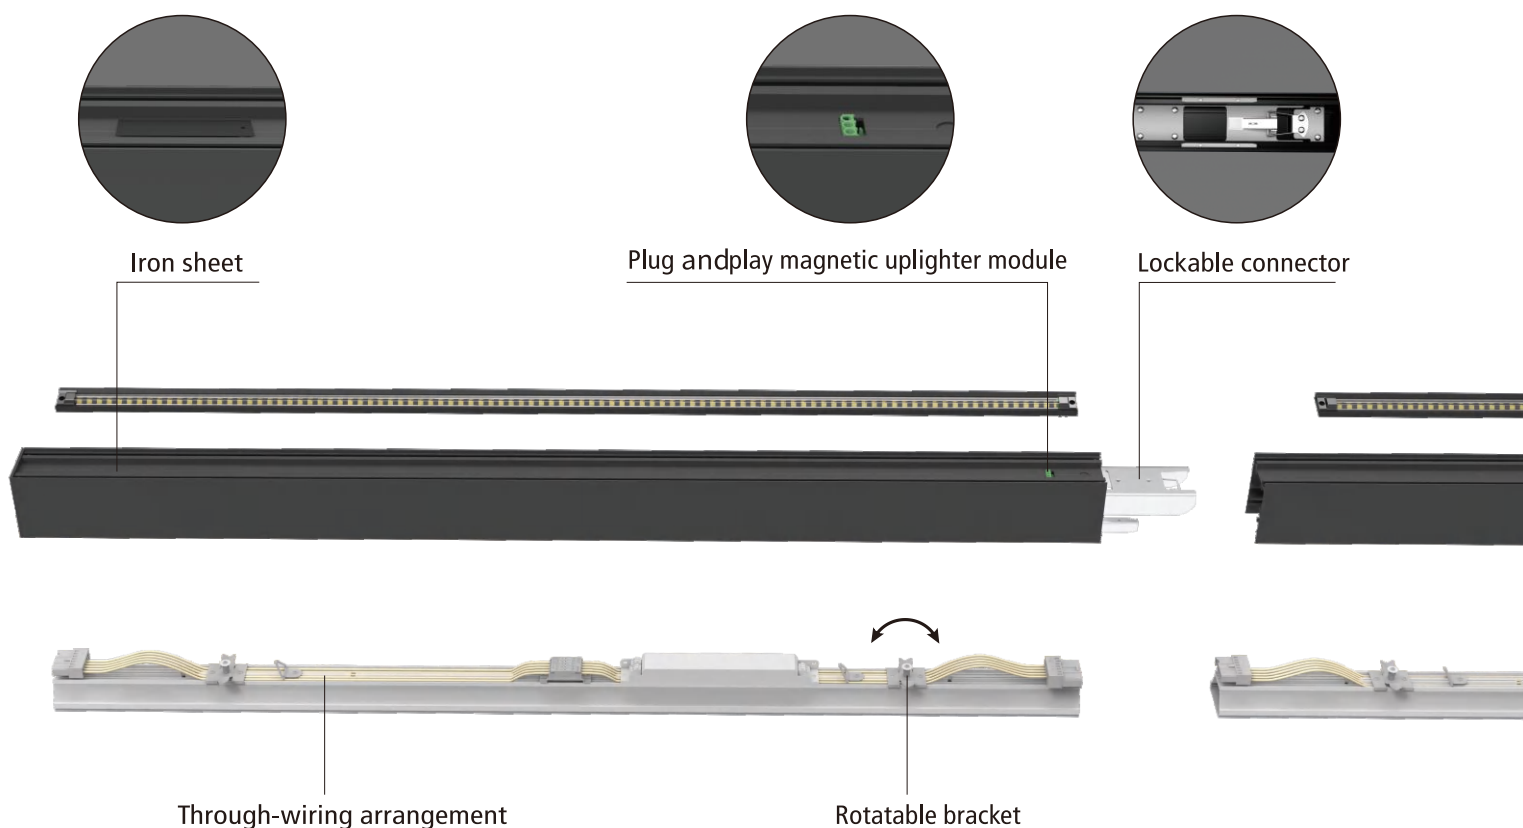

OPTIONS

• DIFFUSER:

OPAL DIFFUSER Max length 40M



PRISMATIC DIFFUSER Max length 20M



Note:

Prismatic diffuser is UGR<19, when used with uplighter the prismatic diffuser version will be UGR<16.

CONTROL:

-Analogue dimming: 1-10V DIM

CASAMBI

DIMENSIONS


Front view

Side view



MODEL NO	DIMENSIONS(L×W×H) (mm)
LN60800601C	600×60×80
LN60801201C	1200×60×80
LN60801501C	1500×60×80
LN6080301C	3000×60×80

PHOTOMETRIC DATA

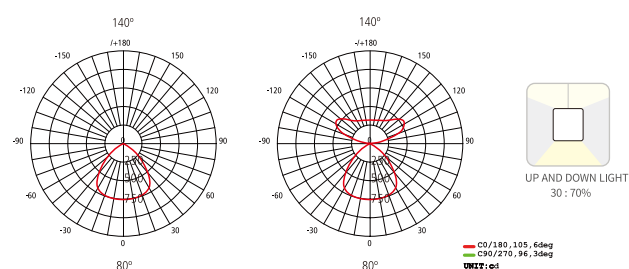



ACCESSORIES

IMAGE	MODEL NO.	RECOMMENDED QTY WHEN JOINED
FOR SURFACE MOUNTED AND SUSPENDED USE		
	000001B MOUNTING CLIPS	Mounting point @ every 1.5m
	000001CAP END CAP BK	One for each end
	000002CAP END CAP WH	
	OPAL DIFFUSER	Add connecting lengths together to get the correct cutting run
	PRISMATIC DIFFUSER	


Package

Package	Product Size (mm)	Carton L (cm)	Carton W (cm)	Carton H (cm)	Total Volume (CBM)	G.W (KG)	G.W (KG)	Volume weight
4pcS/carton	1200mm	137	37	15	0.076	13	12	15.207
	1500mm	163	37	15	0.090	17	12	18.093

Recessed

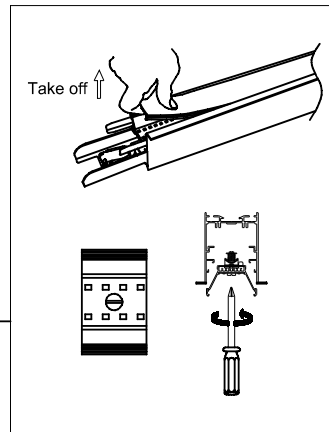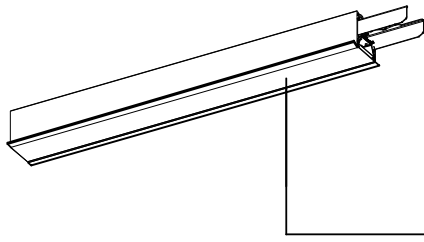

Disassemble

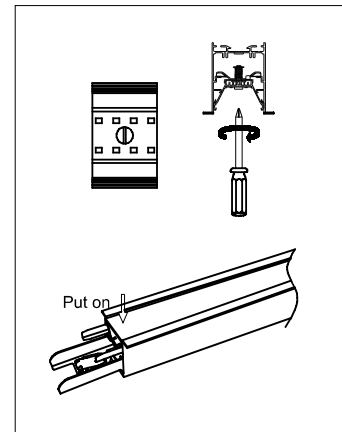

Assemble

