






## LED LINEAR LIGHT SPECIFICATION

### LUMILENA GR Linear Light Single /Continuous Line option

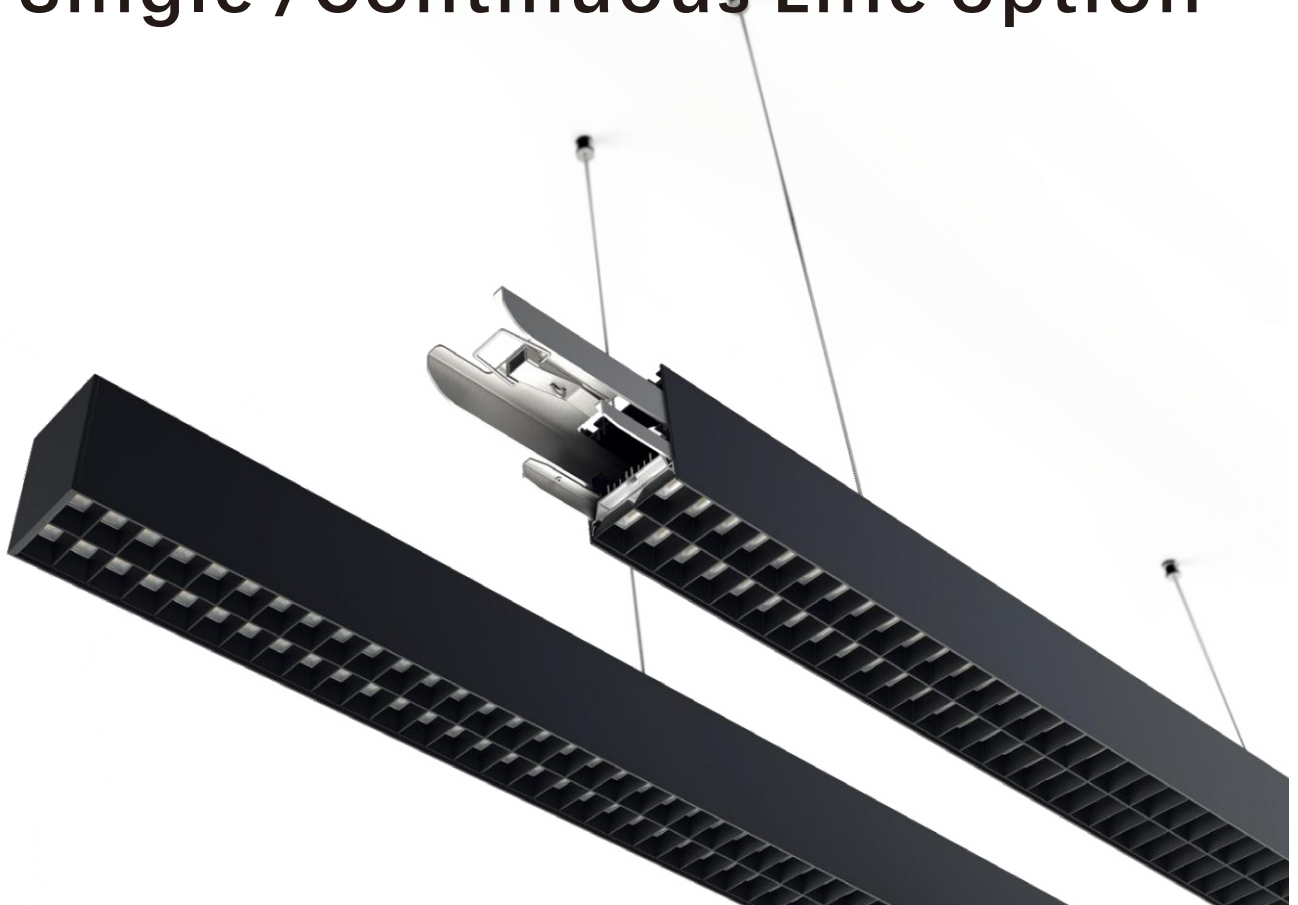

Note: Lumiwise may change product specifications and installation guidance without prior notice.

## LUMILENA GR Series

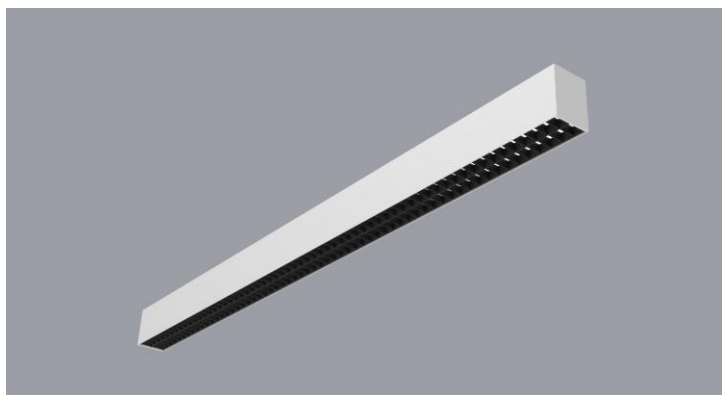

## Features&amp; Benefits

- High efficacy of more than 130LM/W.
- Seamless connection without light leakage.
- Fast installation and easy maintenance.
- EN12464-1 compliant.
- Shining free and uniform light.
- Dot free illumination and screwless endcap.



Discreet and timeless pendant light with direct or direct/indirect light emission.

Aluminum profile powder-coated in white and black.




Highly efficient lighting system with optimal light control.

Available in anti-glare or efficiency-optimized versions.

Excellent for office areas ( $UGR \leq 16$ ) and computer workstations.

Available in individual light colors as well as freely adjustable light colors, making them ideal for modern interior lighting design.

## Dimension

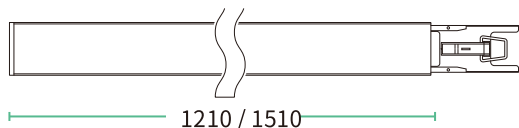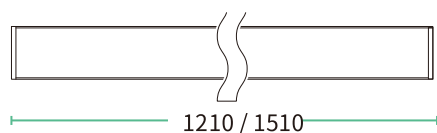

Individual




Continuous


## Luminaire Parameters (Data tested by ies)

Item Code	LN6080121CGR		LN6080151CGR		LN6080301CGR	
Size	1210*60*80mm		1510*60*80mm		3032*60*80mm	
Efficacy			120lm/W-130lm/W			
UGR			<16(Direct) , <13 (indirect/direct)			
Diffuser material			LENS+REFLECTOR			
Lumens	2654lm (Direct Light)	1900lm ↑ +2900lm ↓ (Indirect 40%+Direct 60%)	3630lm (Direct Light)	2400lm ↑ +3600lm ↓ (Indirect 40%+Direct 60%)	8000lm (Direct Light)	4800lm ↑ +7200lm ↓ (Indirect 40%+Direct 60%)
Typ.power	25W	32W	27W	40W	53W	80W
CCT			3000K/4000K/3000-6500K			
CRI			>80 ( 90 optional)			
Beam angle			70° (direct) & 140° ↑ 70° ↓ (Indirect/direct )			
Input voltage			200-240VAC 50Hz/60Hz			
Linkable			Under request			
Power factor			>0.9			
Power Supply			BOKE /TRIDONIC Driver			
Dimming			On/off or DALI			
Color			 			
Installation			RAL 9016 RAL 9005 Ceiling Surface mouted/Pendant			
Warranty			5 years			
Certifications			CE/RoHS			


## Continuous Connction System

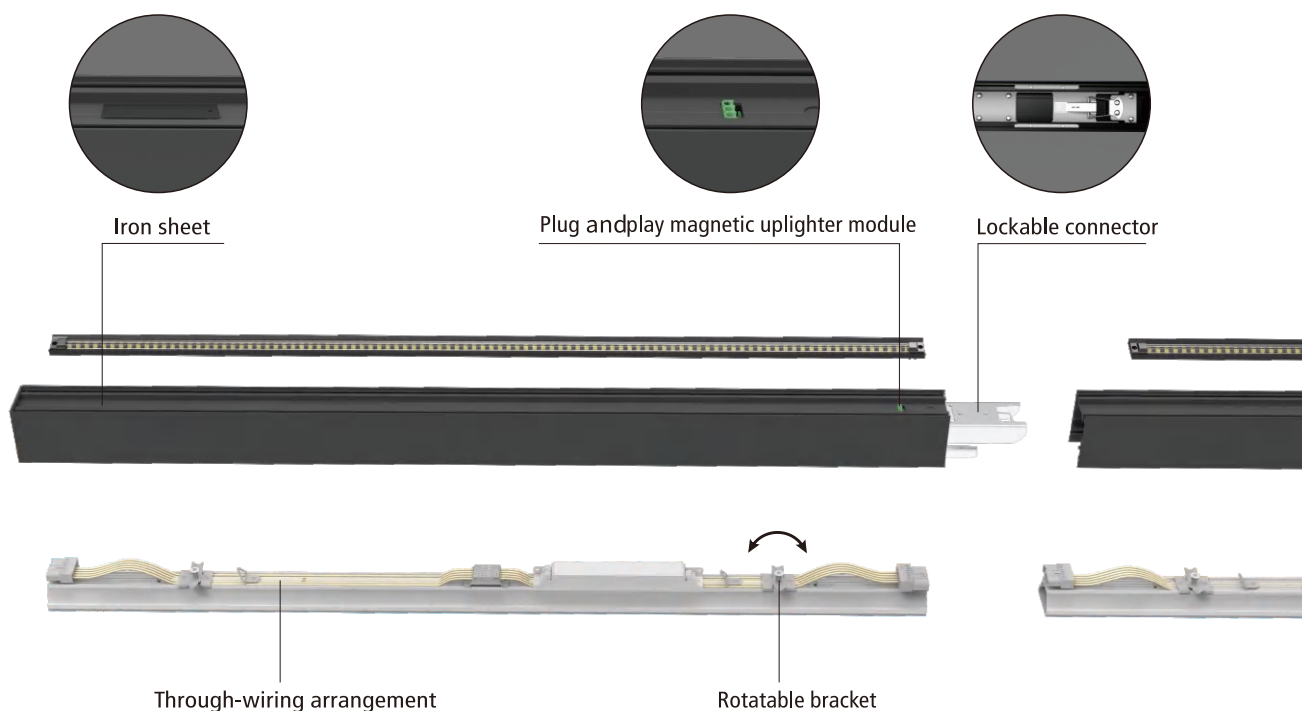

## Photometrical (ies/LDT files under request)

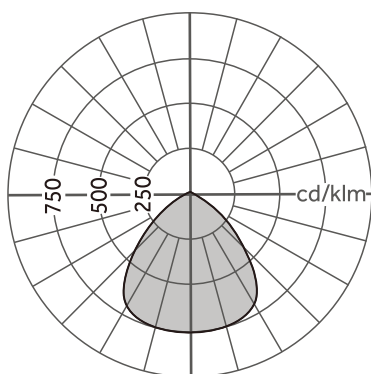

Direct light

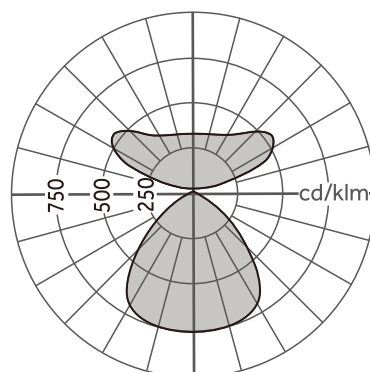

Direct/indirect

## Accessories



Cord Suspension Kit,1.5m



Ceiling Clip



Power Cable with Connector, 3 Wires,1.5m



Power Cable with Connector, 5 Wires,1.5m

## Package

Package	Product Size (mm)	Carton L (cm)	Carton W (cm)	Carton H (cm)	Total Volume (CBM)	G.W (KG)	G.W (KG)	Volume weight
4pcS/carton	1200mm	137	37	15	0.076	13	12	15.207
	1500mm	163	37	15	0.090	17	12	18.093

## Applications:

Office ,school ,airport or other commercial lighting

