

LUMIWISE[®]

LED CEILING LIGHT SPECIFICATION

PL-R D1200



Note: Lumiwise may change product specifications and installation guidance without prior notice.

PL-R D1200


Thanks to our round and slim design ,PL-R series is classic ceiling light to meet wide interior space lighting with different mounting solutions.

Features& Benefits


- High efficiency 140lm/W
- Ceiling light is with aluminum housing
- Opal or Microprismatic diffuser (UGR<19)
- 100% Direct , 25% indirect& 75% direct
- 350mm,450mm, 600mm, 900mm, 1200mm option
- Color Temperature 3000K 4000K
- 2/3 CCT Dipswitch adjustment or Tunable white
- Indirect and direct light seperated Control
- Multiple Color finishes available
- multiple installation ways available as surface mounted, recessed, Suspended
- 5 Year Warranty




Dimension (Unit: mm)

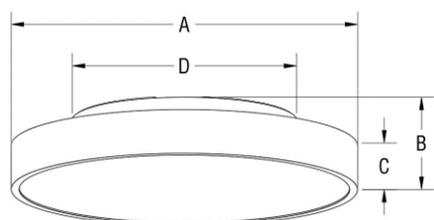

Ceiling Mounted

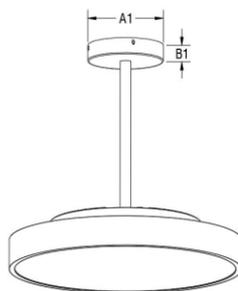

Wires Suspended



Rod Suspended

Item Number	Size A(mm)	Size B(mm)	Size C(mm)	Size D(mm)	A1/A2*B1/B2
PL-R-1200-150-XXDT Direct	1200	92	55	630	200*30
PL-R-1200-185-XXDI Direct/Indirect					


Dimension	Efficacy	Lumen Output	Watt	Dimming	CCT	CRI
1200mm	Direct	20,500lm	147W	On/OFF	3000k/4000k/5000k Fixed&Switched	>80
	Direct/Indirect	↑ 6,600lm	↑ 46W ↓ 139W	On/OFF		
	(up:down=1:3)	↓ 20,000lm		DALI		

Technical Data


General	Size	D1200*H92mm
	Color	White(RAL9016),Black(RAL9005) as standard, other finish available on request
	Material	Aluminum + PMMA Microprismatic diffuser/Opal diffuser
Electrical	Efficacy	140lm/W
	Wattage	140W –185W (lumenoutput tolerance +5%, power tolerance +5%)
	Voltage	AC220–240V
	Frequency	50/60Hz
	THD	<20%
Optical	Lumen Output	20,500 –26,600lm
	CCT	3000K/4000K/5000K&2&3CCT selectable, 2700K–6500KTunable White
	Light Source	SMD2835
	CRI	>80Ra as standard(>90Ra available)
	Beam Angle	90°/120° for downlight; 120° for uplight
	SDCM	<5 as standard(<3 available)
Durability	Lifespan	50,000H(L80,Tc ₅₀ 55°C)
	Warranty	5 years
	Operating Temperature	-20~+40°C
	IP Protection	IP20
	IK Protection	IK02
Function	Dimmable	No dimming/DALI as standard Tunable white, 3 CCT selectable available
	Control	Up and down lighting seperated control available
	Sensor	Motion sensor&Daylight sensor available on request



Photometric data

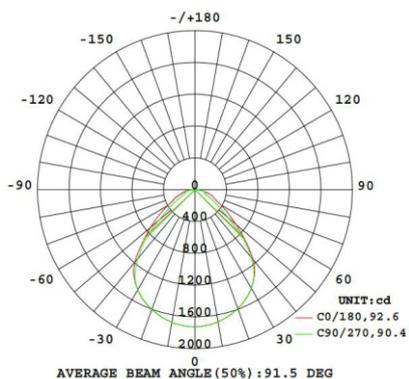

Direct Lighting

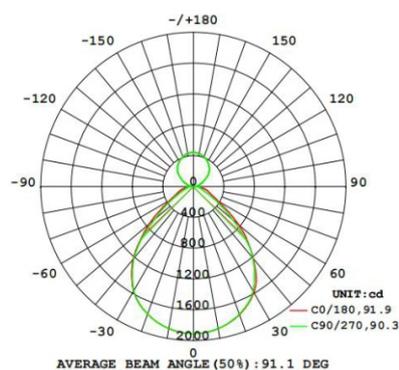

Indirect/Direct Lighting

Order Information

Product Name	Diameter	Watt	Light Distribution	Dimming	CCT
PL-R- Product family	1200-1200mmφ	150-150W 185-180W	DT-Direct Lighting DI-Direct/Indirect Lighting	01-On/Off 02-DALI Dimming	30-3000k 40-4000k 50-5000k
CRI	Finish				
08-Ra80	W-White				
09-Ra90	B-Black				

Example: PL-R-1200-150-0140K08DTW

Expplanation: PL-R Light,1200mm ,140W,Direct Lighting, On/Off, 4000K, 80CRI, White Finish

Applications



fashion



home store



department store



automotive

consumer
electronics

food

Widely applied for general lighting in office retail shops, galleries, museum Living Room or any other interior lighting.



Package Info

